
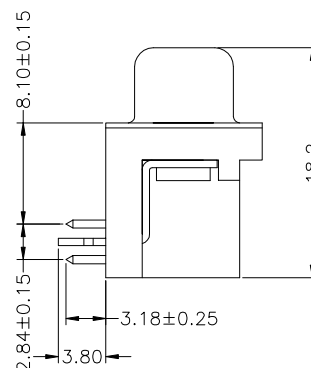
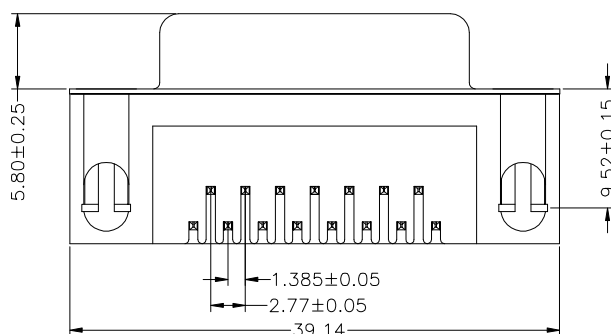
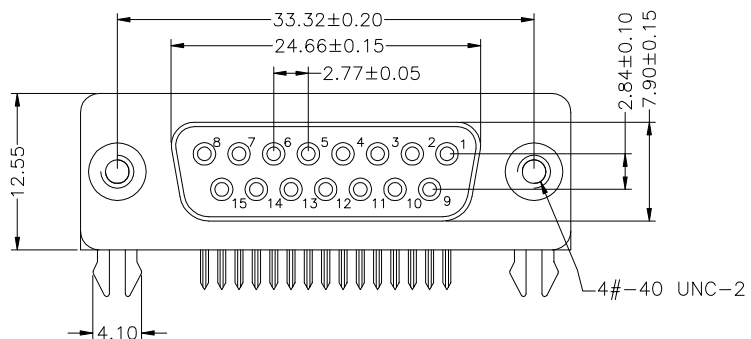
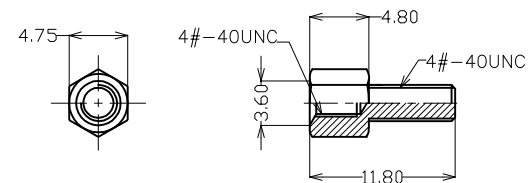
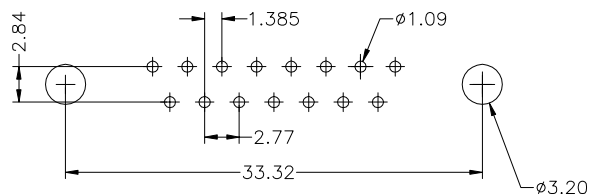


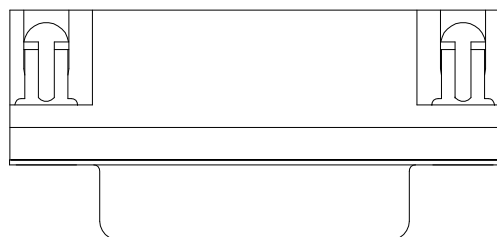

NOTES: P.C.B. LAYOUT

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact:Brass 0.2T Gold **Flash** Plated
- 1.3 Shell:Steel,Gold Plated
- 1.4 Screw:Brass Gold Plated

2.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:5000M Ω Min. at 500V DC
- 2.3 Dielectric Strength:1000V Per minute
- 2.4 Operation Temperature:-55 $^{\circ}$ C to+105 $^{\circ}$ C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DR-SGNH-15-LF
SERIES T T T LEADFREE
15 WAY
FEMALE T HEX SCREW
NUT
FULL GOLD

DESCRIPTION: