
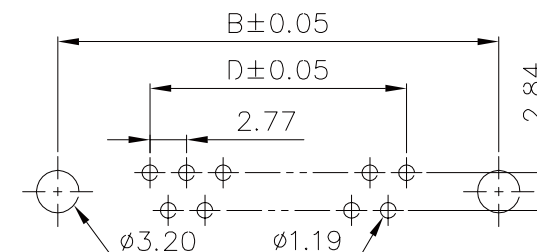
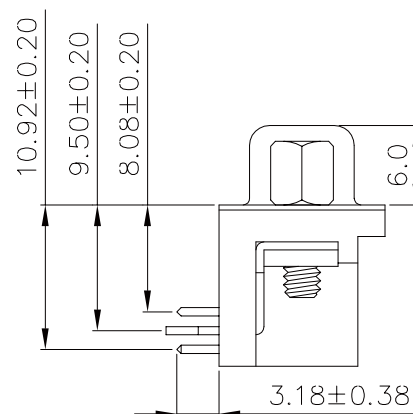
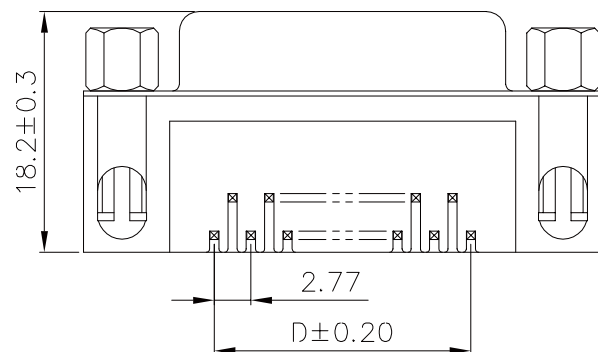


Material:


Insulator: PBT+30% Glass Fiber (UL94V-0).
Contact: Copper Alloy.
Contact Plated: Gold or Tin over Nickel Plated.
Shell: Steel with Nickel or Tin or Zinc Plated.

Specification:

Current Rating: 5 Amps.
Withstanding Voltage: AC 500V for 1 Minute.
Insulation Resistance: 1000M Ω Min. at DC 500V.
Contact Resistance: 15m Ω Max..
Operating Temperature: -40°C ~ +105°C.

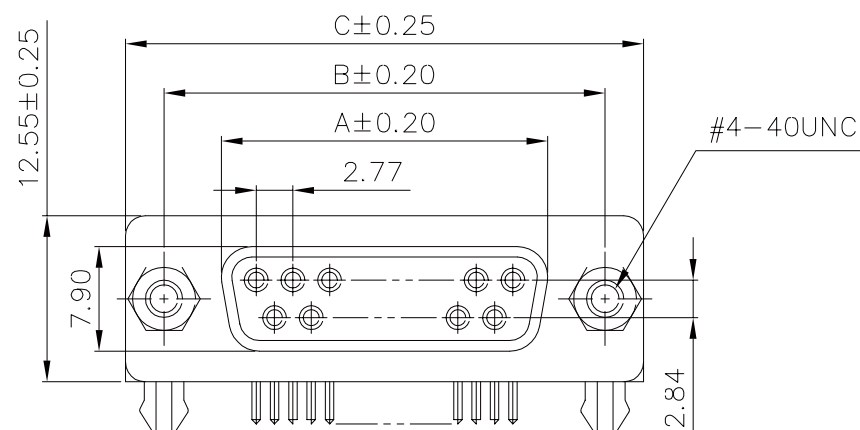

RECOMMEND P.C. BOARD LAYOUT

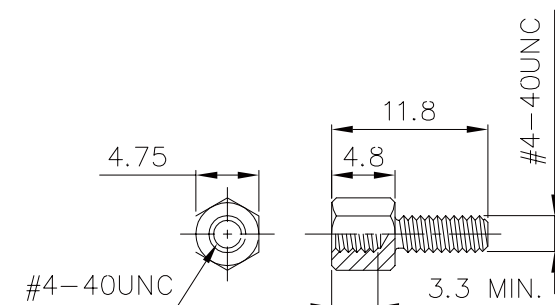

LOCKING SCREW

Pos.	Dim. A	Dim. B	Dim. C	Dim. D
9	16.33	24.99	30.81	11.08
15	24.66	33.32	39.14	19.39
25	38.38	47.04	53.04	33.24
37	54.84	63.50	69.32	49.86

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

DR-SGNJ-xx-LF
SERIES LEADFREE
FEMALE 09~37WAY JACKSCRW
NUT GOLD

DESCRIPTION: D-Sub Female Right Angle
Connector Footprint 8.08mm Clinch Nut/Screw Lock Type