
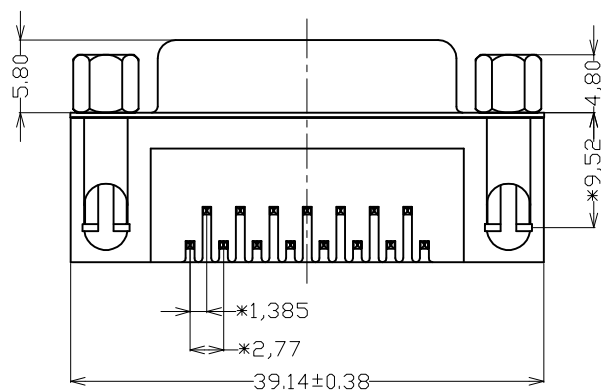
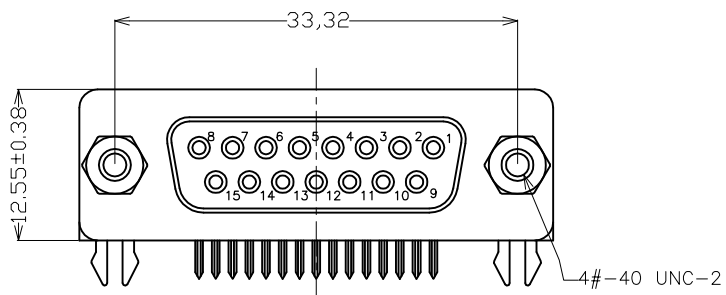
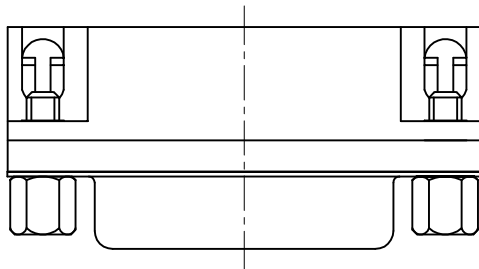


NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact:Brass
- 1.3 Contact:Gold/TIN Plated
- 1.4 Shell:Spcc,NICKEL Plated
- 1.5 Screw, Brass, NICKEL Plated

2.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:1000M Ω Min.
- 2.3 Dielectric Strength:500V AC Per minute
- 2.4 Operation Temperature:-55 $^{\circ}$ C to +105 $^{\circ}$ C
- 2.5 Contact Resistance:30m Ω max

3.重點尺寸標示:*

PART NO.	CONTACT PLATING	COLOR
	GOLD/TIN PLATED	black

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.15
ANG $\pm$ 2 $^{\circ}$

PPOJECTION

照片框

ORDER INFORMATION

DR-SS-15-LF
SERIES LEADFREE
15 WAY
SEMI GOLD
FEMALE

DESCRIPTION: DR15母叉鎖半金黑 8.1 簡易型RoHS