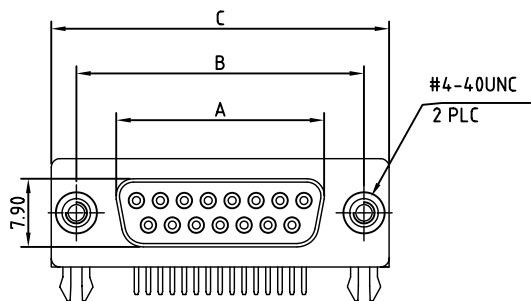


### Note

| No. | A     | B     | C     |
|-----|-------|-------|-------|
| 09  | 16.33 | 24.99 | 30.81 |
| 15  | 24.66 | 33.32 | 39.14 |
| 25  | 38.38 | 47.04 | 53.04 |
| 37  | 54.83 | 63.50 | 69.32 |





### ELECTRICAL CHARACTERISTICS

Contact Current Rating: 3Amperes.  
 Dielectric Withstanding Voltage:AC 500V at sea level.  
 Insulation Resistance:1000Megohms Min.  
 Contact Resistance:30Milliohms Max.  
 Operation Temperature : -55°C to +105°C.

### Material

Contact :Copper Alloy.  
 Insulator:PBT. [Select PA6T /LCP /PA9T]  
 Shell: SPCC.  
 Z-Piece: Copper Alloy.  
 Screw: Copper Alloy.  
 Rivet: Copper Alloy. or Zinc.

### Recommend PCB Layout

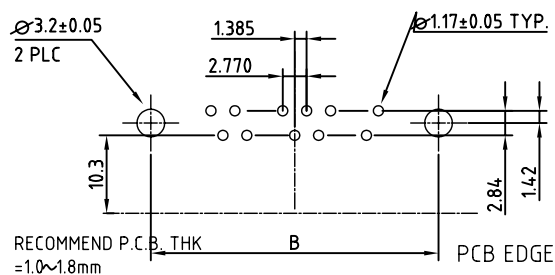

### RoHS Compliant

TOLERANCES ARE

照片框

### ORDER INFORMATION

DR-SSxx-xx-LF  
 SERIES | | | LEADFREE  
 | | | 09~37 WAY  
 FEMALE | N:NUT  
 HALF GOLD | NH:NUT+HEX SCREW  
 | NJ:NUT+JACKSCREW

DESCRIPTION:

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
 .X ± 0.30  
 .XX ± 0.25  
 .XXX ± 0.15  
 ANG ± 2°