
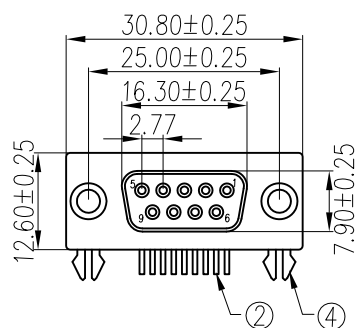




P.C.B. LAYOUT

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Mating force: 5.5 Kgf Max.
6. Unmating force: 1.7 Kgf Min.
7. Temperature range: -55°C~+105°C

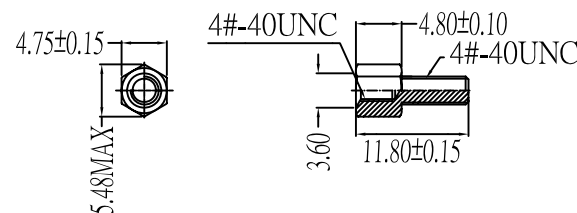

5	Rivated	2	Brass	5.4*5.1mm	80u"min Nickel Plated
4	"Z" type board-lock	2	Brass	T=0.50mm	80u"min Tin Plated
3	Front-shell	1	Cold rolled steel	T=0.40mm	Cu: 40u"min. 80u"min Nickel Plated
2	Contact	9	Brass	T=0.20mm	Contact area: 0.8u"min Gold Plated over 40u"Nickel min. Solder area: 80u"min Tin Plated over 40u"Nickel min. (All Gold)
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

TOLERANCES ARE

煜倫股份有限公司

www.morethanall.com

SIZE A4

PPOJECTION 

X. $\pm$
 .X $\pm$ 0.30
 .XX $\pm$ 0.20
 .XXX $\pm$ 0.10
 ANG $\pm$ 1°

照片框

DR-SxNH-09-LF

SERIES LEADFREE
09 WAY
FEMALE HEX SCREW
NUT
S:SEMI GOLD
G:FULL GOLD

DESCRIPTION: D-SUB RIGHT ANGLE P.C.B TYPE 9PIN(F)鉚合