

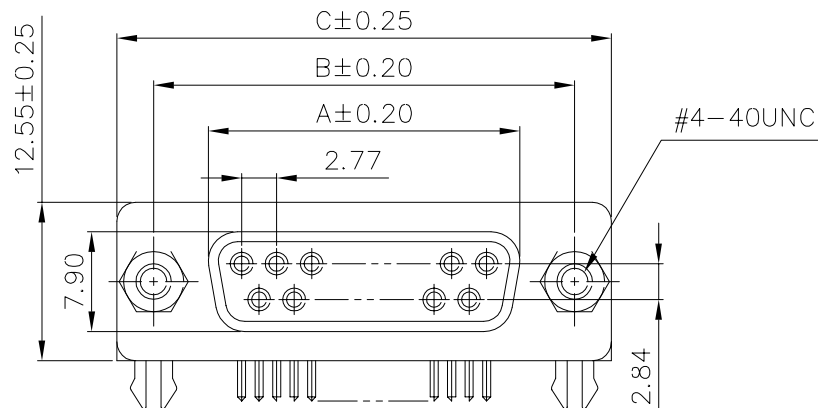
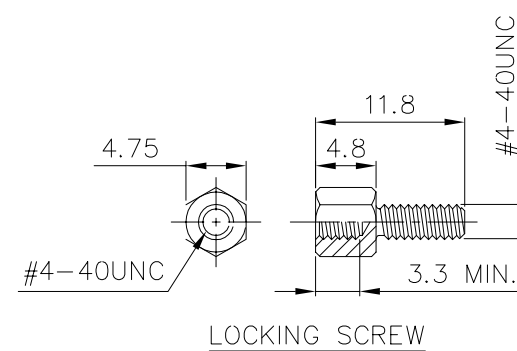
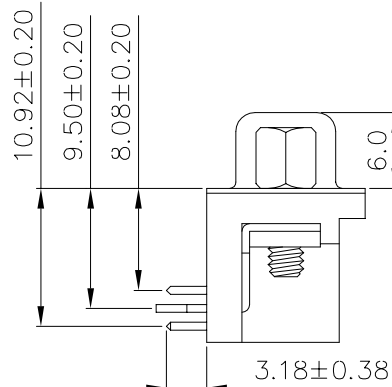


Material:
Insulator: PBT+30% Glass Fiber (UL94V-0).
Contact: Copper Alloy.
Contact Plated: **Selective Gold Flash** Plated.
Shell: Steel with Nickel or Tin or Zinc Plated.
4-40 3Threaded Riveted & jack Screws Assembled.

Specification:
Current Rating: 5 Amps.
Withstanding Voltage: AC 500V for 1 Minute.
Insulation Resistance: 1000M Ω Min. at DC 500V.
Contact Resistance: **30 m Ω** Max..
Operating Temperature: -40°C ~ +105°C.

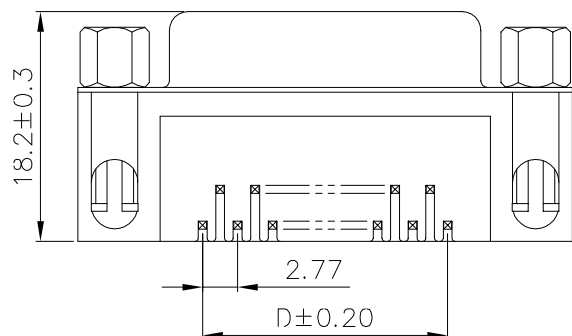

DR-SxNJ-xx-LF
S:SEMI GOLD G:FULL GOLD **LEADFREE**
RoHSCompliant

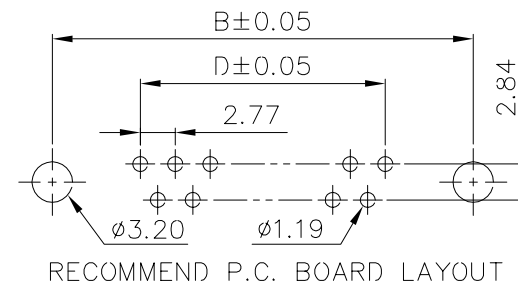

Pos.	Dim. A	Dim. B	Dim. C	Dim. D
9	16.33	24.99	30.81	11.08
15	24.66	33.32	39.14	19.39
25	38.38	47.04	53.04	33.24
37	54.84	63.50	69.32	49.86

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. **DR-SxNJ-xx**

DWG NO. **DR-SxNJ-xx**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X±0.2
.XX±
.XXX±
AWG

DESCRIP TION:

D-Sub Female Right Angle
Connector Footprint 8.08mm
Clinch Nut/Screw Lock Type

AREA

REVISIONS

HK

DATE

煜倫股份有限公司