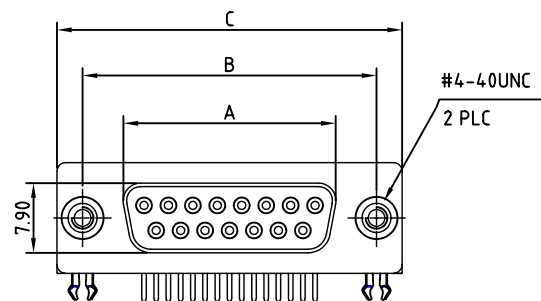


Note






No.	A	B	C
09	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.83	63.50	69.32

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 3 Amperes.
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Operation Temperature: -55°C to +105°C.

Material

Contact: Copper Alloy.
 Insulator: PBT. (Select PA6T / LCP / PA9T)
 Shell: SPCC.
 Z-Piece: Copper Alloy.
 Screw: Copper Alloy.
 Rivet: Copper Alloy. or Zinc.

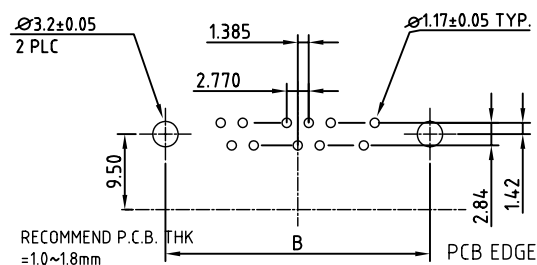

RoHS Compliant

TOLERANCES ARE

X: ±
 .X: ± 0.30
 .XX: ± 0.25
 .XXX: ± 0.15
 ANG: ± 2°

照片框

ORDER INFORMATION

DR-SxZ4xx-xx-LF

SERIES | T LEADFREE
 09~37 WAY
 FEMALE | J: JACKSCREW
 N: NUT
 NH: NUT + HEX SCREW
 G: FULL GOLD
 S: SEMI GOLD
 CLIP | NJ: NUT + JACKSCREW

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

PPOJECTION