


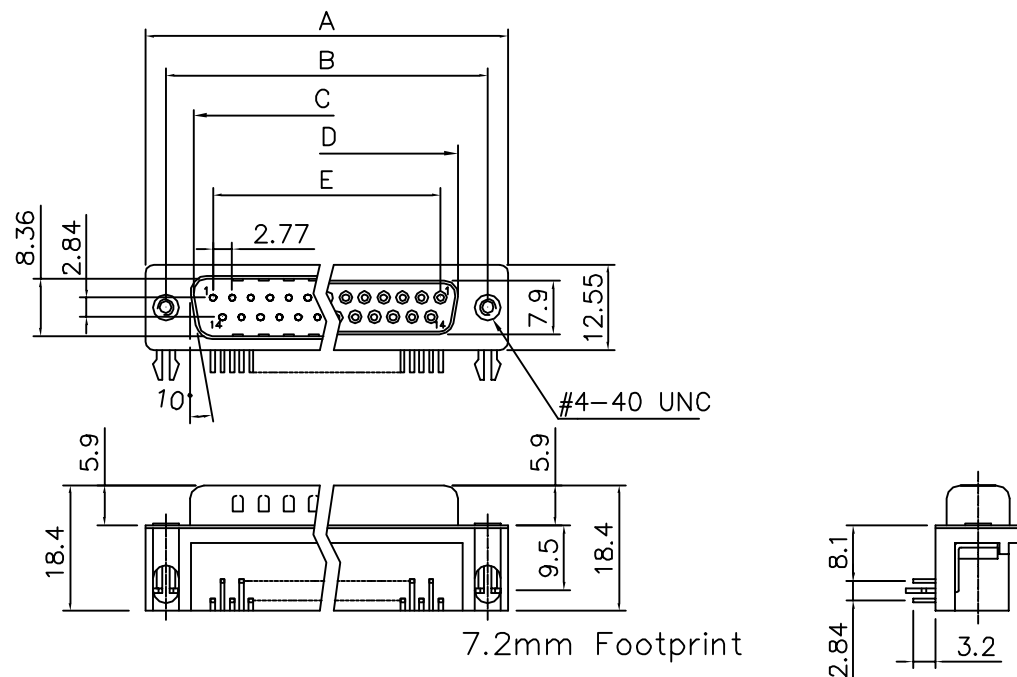

Product Specification

Material

Insulator :Glass-Filled Thermoplastic PBT,UL94V-0 rated

Contact :Brass or Phosphor Bronze

Shell :Steel, 100u" Tin Over 50u" min Nickel.

Clinch Nut: Brass, 100u" min Nickel Plated.

Boardlock :Brass, 100u" min Nickel Plated.

Screwlock :Brass, 100u" min Nickel Plated.

Electrical

Contact Resistance :20 milliohms

Max at 1 AMP DC.

Insulation Resistance :1000

magohms at 500 VDC

Dielectric Withstanding Voltage :

1000 VAC/rms 60Hz for 1 minute

Current Rating :5 AMP

Volatge Rating :250 VAC/rms 60Hz

Dimensions

Positions	A	B	C	D	E
9	30.81	24.99	16.92	16.33	11.08
15	39.14	33.32	25.50	24.66	19.39
25	53.04	47.04	38.96	38.38	33.24
37	69.32	63.50	55.42	54.84	49.86

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

DR-xSN-xx-LF
 SERIES | NUT | LEADFREE
 09-37WAY
 SEMI GOLD
 P:MALE
 S:FEMALE

DESCRIPTION: D-SUB RIGHT ANGLE TYPE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com