

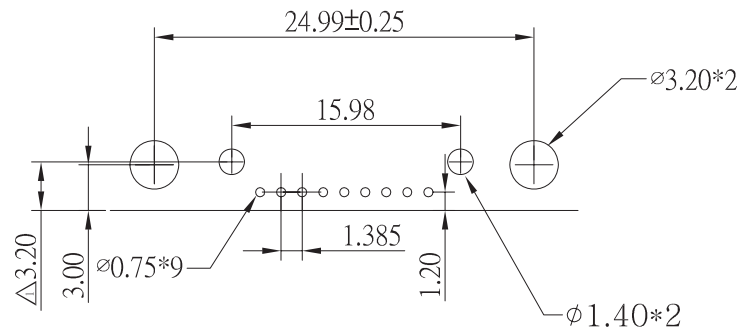
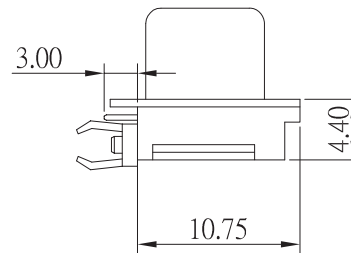
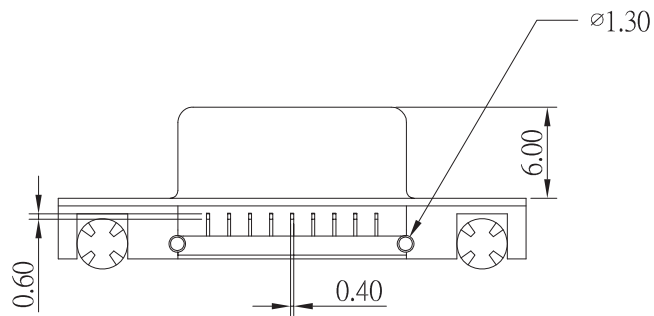


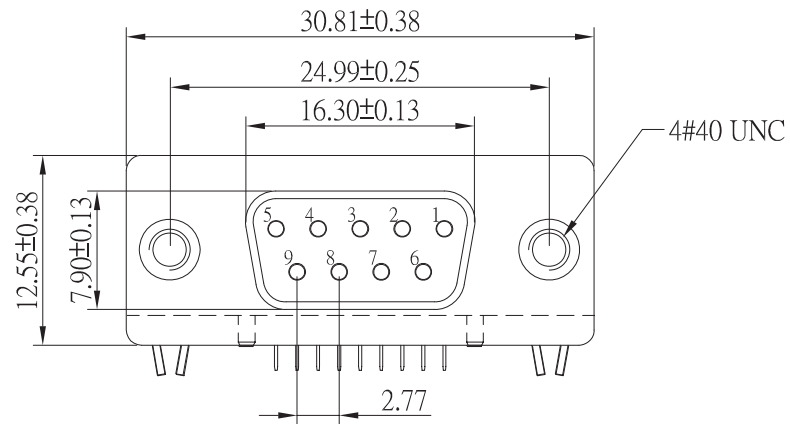

MATERIAL
HOUSING : HIGH TEMPERATURE HOUSING
NY-9T (UL94V-0) WITHSTANDS IR AND
VPR SOLDERING METHODS.
CONTACTS : PHOSPHOR BRONZE.
PLATING : SELECTIVE GOLD PLATED.

SPECIFICATION
CURRENT RATING : 1AMP.
INSULATOR RESISTANCE 5000M Ω MIN. AT DC 500V.
CONTACT RESISTANCE : 20M Ω MAX. AT DC 100mA.
OPERATING TEMPERATURE : -65°C~+125°C.
MAX PROCESSING TEMPERATURE: 260 $\pm$ 10°C FOR 3~5 SECONDS.

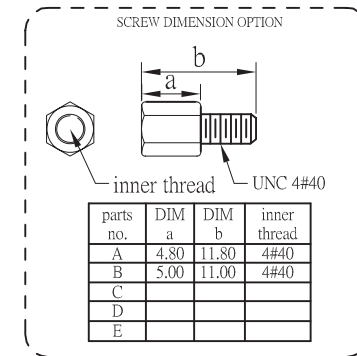

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.50
ANG $\pm$ 3°

P PROJECTION

照片框

ORDER INFORMATION

DR12-SNZ4H-09-LF

SERIES
FEMALE
NUT
CLIP
HEX SCREW
09 WAY
LEADFREE

DESCRIPTION: D-SUB CONNECTOR SLIM DIP TYPE (1.20mm) 09 FEMALE