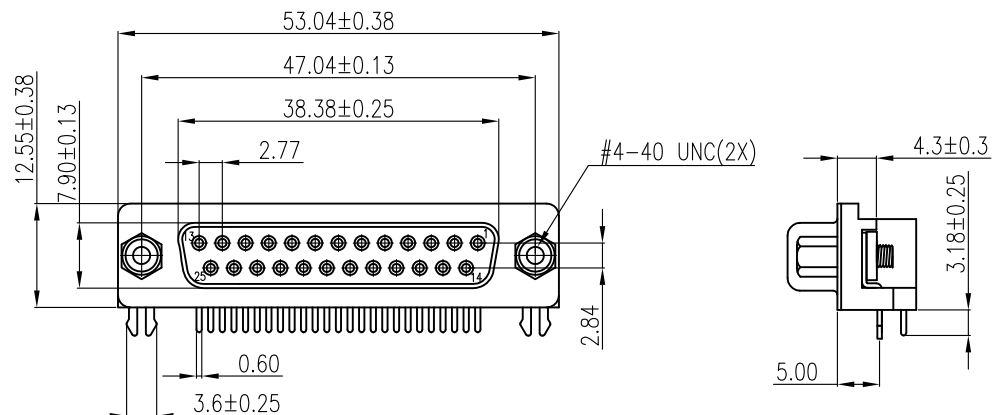


RECOMMEND P.C. BOARD LAYOUT
PCB TOLERANCE: ±0.05

MATERIAL:

INSULATOR : PBT OR NYLON 9T, UL 94V-0.
CONTACT : COPPER ALLOY.
CONTACT FINISH : GOLD OVER NICKEL.
SHELL : STEEL, NICKEL PLATED.
BOARDLOCK : STEEL, TIN PLATED.
RIVETED INSERT : ZINIC ALLOY, NICKEL PLATED.
SCREW : BRASS, NICKEL PLATED

SPECIFICATION:

CURRENT RATING : 5 AMP
DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.
INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
CONTACT RESISTANCE : 15mΩ MAX.
OPERATING TEMPERATURE : -55°C ~ +105°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

DR50-SGNJ-25-LF

SERIES
LEADFREE
25 WAY
JACKSCREW
NUT
FULL GOLD
FEMALE

DESCRIPTION: D-SUB CONN RIGHT ANGLE FEMALE FOOTPRINT: 5.0mm, WITH SCREW