

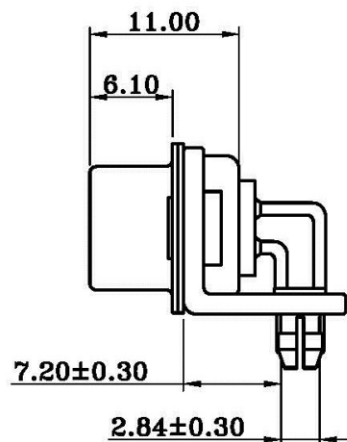
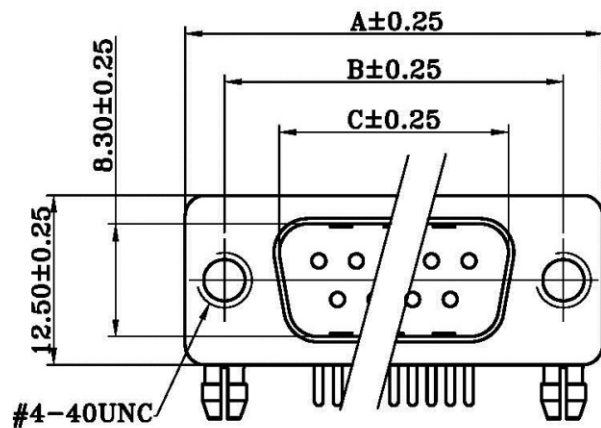


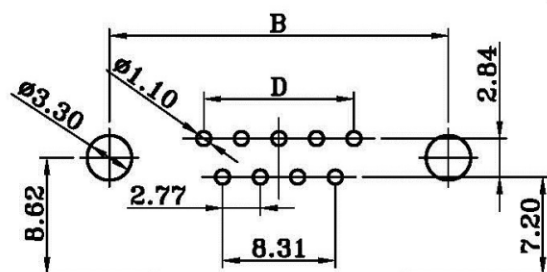

面 式 バ ッ	A	B	C	D
09	30.80	25.00	16.90	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.05	38.95	33.24
37	69.40	63.50	55.40	49.86

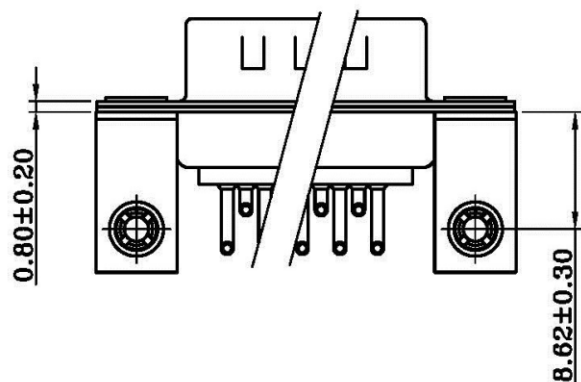

PCB LAYOUT

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHELL TIN FINISHED
BACK SHELL TIN FINISHED
DIMPLES ON PLUG ONLY

INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED,
UL 94V-0 RATED, BLACK COLOR

SIGNAL CONTACT : COPPER ALLOY, FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS

CONTACT RESISTANCE : 10 mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.

INSULATION RESISTANCE : 5GΩ MIN.

TEMPERATURE RATING : -55°C ~ +125°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

DR72-PZN-xx-LF

SERIES T T T LEADFREE
09~37WAY
NUT
CLIP
MALE

DESCRIPTION: