
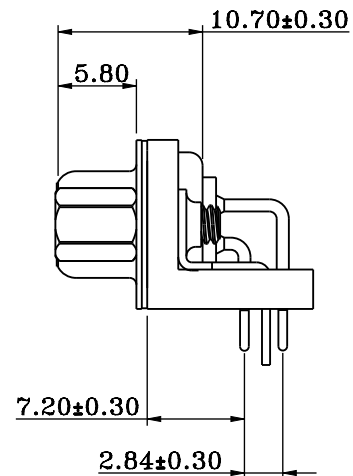
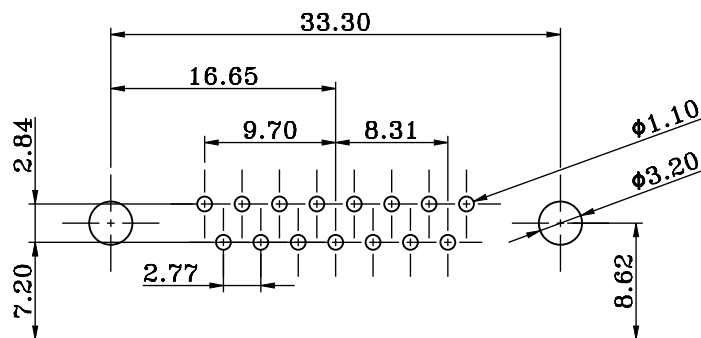
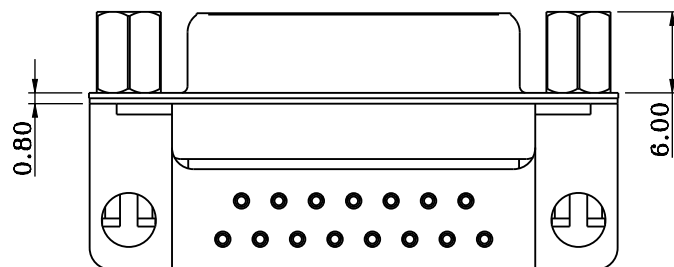


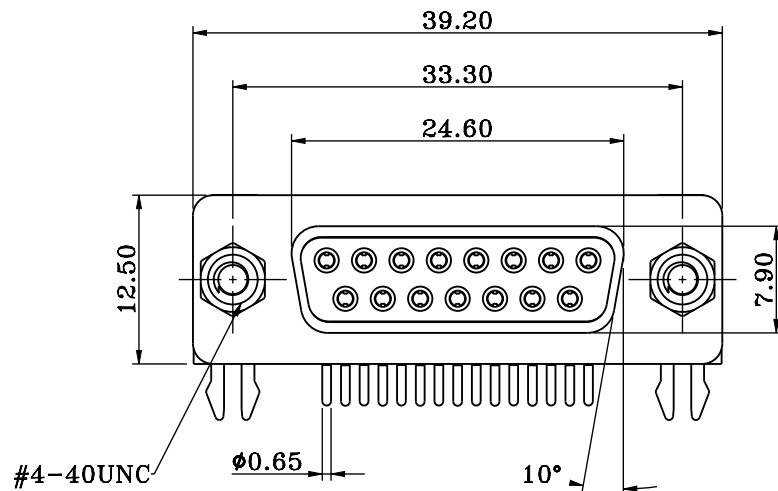

MATERIALS AND FINISH

SHELL: STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
BACK SHELL NICKEL FINISHED
DIMPLES ON PLUG ONLY

INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED
UL 94V-0 RATED, WHITE COLOR

CONTACT: PRECISION MACHINED COPPER ALLOY
FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 A
CONTACT RESISTANCE : 10 mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5GΩ MIN.
TEMPERATURE RATING : -55°C ~ +125°C

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ± 5°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

DR72-SZJ-15-LF

SERIES

15

WAY

JACK

SCRW

CLIP

FEMALE

LEADFREE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com