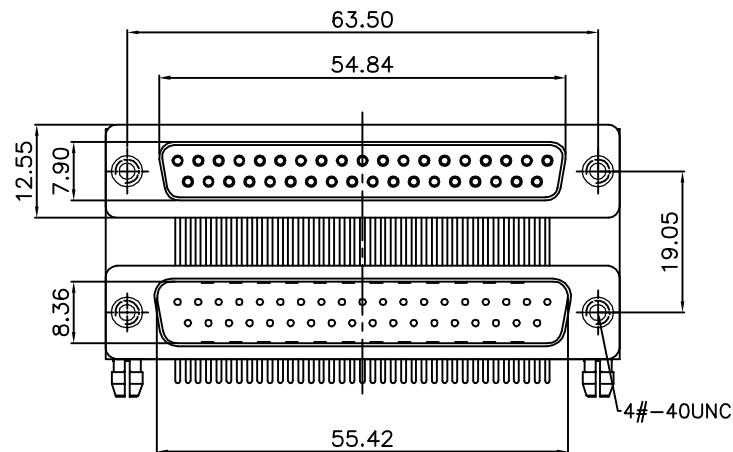


PCB Edge

Recommended P.C.B Layout

1. Specification:

Current Rating: 5 Amperes.

Contact Resistance: 10 mΩ Max.

Dielectric Withstanding Voltage: 1000V For 1 Minute.

Insulation Resistance: 5 GΩ Min.

Operation Temperature: -25°C To +85°C

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

ORDER INFORMATION

DR72B1-AN19-3737-LF

SERIES

LEADFREE

37 TO 37WAY

SPACING 19.05mm

NUT

FEMALE TO MALE

DESCRIPTION: D-SUB, Dual 37F -37M, R/A, Machine Pin

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com