

No. of Contact	A ± 0.25 $\pm .010$	B ± 0.13 $\pm .005$	C ± 0.38 $\pm .015$	D
09	16.33 .643	24.99 .984	30.81 1.213	11.08 .436
15	24.66 .971	33.32 1.312	39.14 1.541	19.39 .763
25	38.38 1.511	47.04 1.852	53.04 2.088	33.24 1.310
37	54.84 2.159	63.50 2.500	69.32 2.729	49.86 1.963




MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
BACK SHELL TIN FINISHED
INSULATOR : PBT THERMOPLASTIC, 30% GLASS
FILLED, UL 94V-0 RATED, BLACK COLOR
CONTACT MATERIAL : BRASS
CONTACT FINISH : FULL GOLD FLASH
RIVETED INSERT : BRASS MATERIAL , NICKEL FINISHED
JACK SCREWS : BRASS MATERIAL , NICKEL FINISHED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Notice:
The size has mark is important
Need double measure

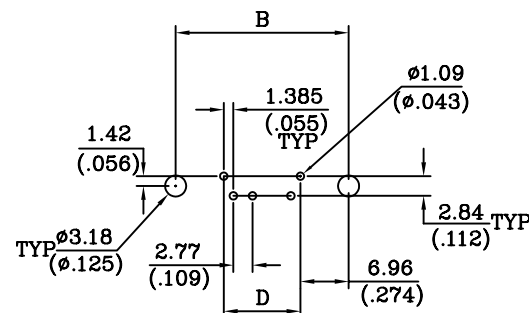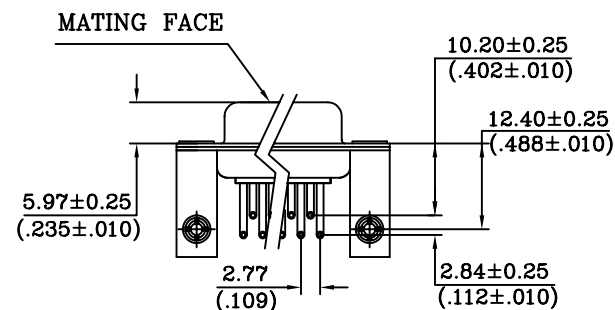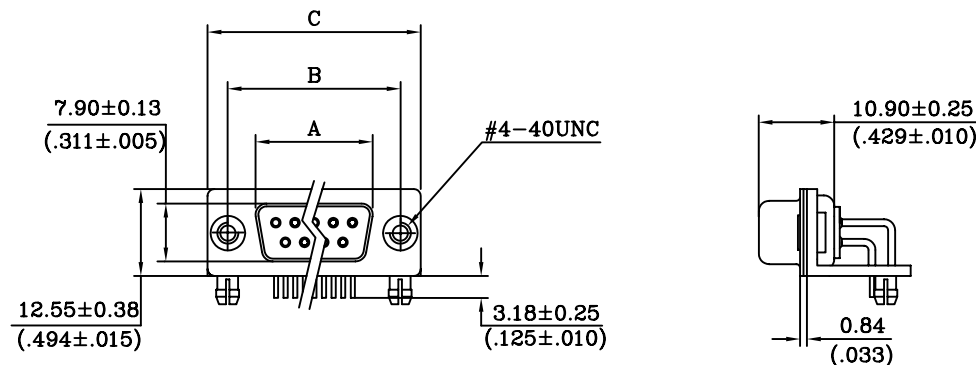

P.C.B LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DR94-SZN-xx-LF

SERIES
LEADFREE
09~37 WAY
NUT
CLIP
FEMALE

DESCRIPTION: D-sub Machined Pin .37" Footprint