
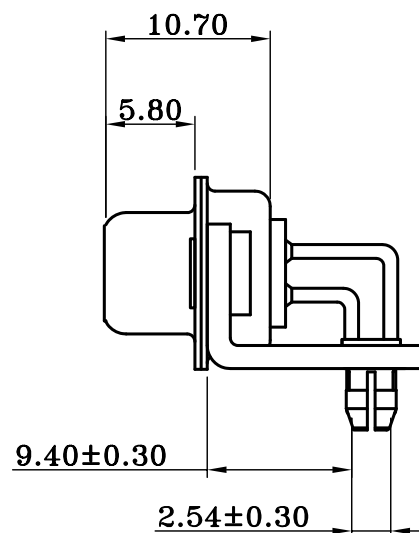



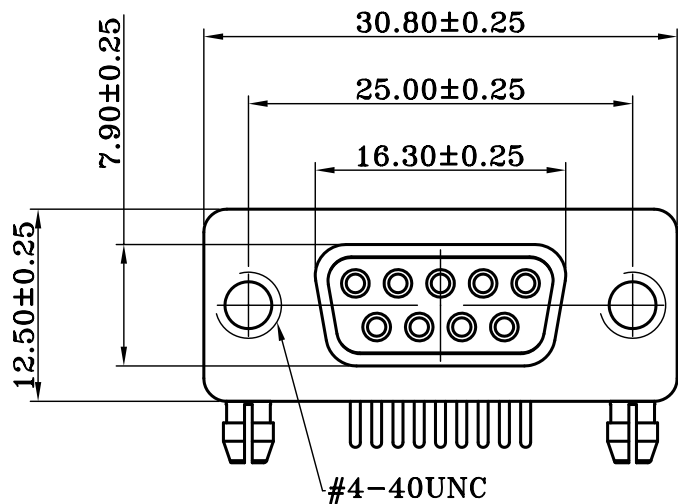


#### MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHELL TIN FINISHED  
BACK SHELL TIN FINISHED  
DIMPLES ON PLUG ONLY  
INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED,  
UL 94V-0 RATED, BLACK COLOR  
SIGNAL CONTACT : COPPER ALLOY, FULL GOLD FLASH

#### ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 7.5 AMPS  
CONTACT RESISTANCE : 10 mΩ MAX.  
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.  
INSULATION RESISTANCE : 5GΩ MIN.  
TEMPERATURE RATING : -55°C ~ +125°C

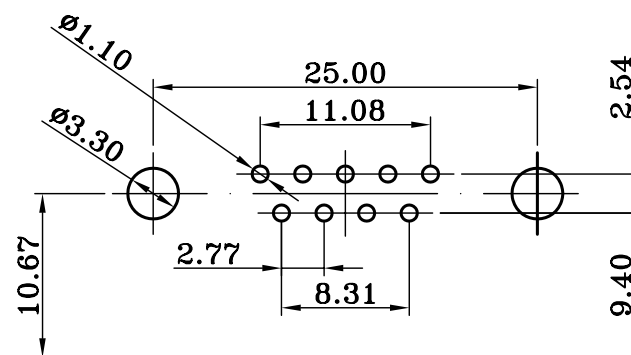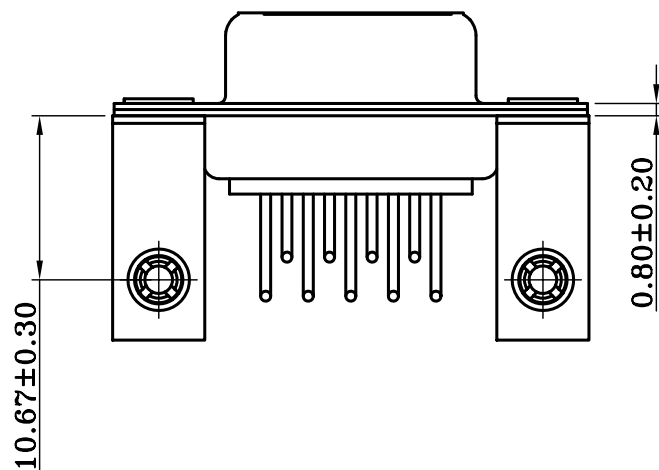

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

#### ORDER INFORMATION

DR941-SZN-09-LF

SERIES NUT  
CLIP  
FEMALE  
LEADFREE  
09 WAY

DESCRIPTION: