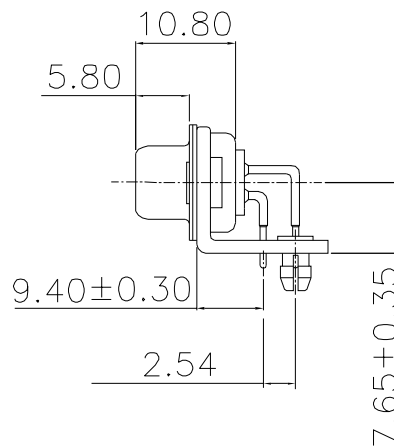
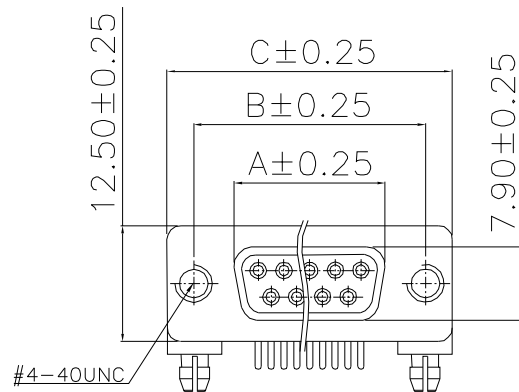


Recommended PCB Layout

No	A	B	C
09	16.30	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.83	63.50	69.32

Material And Finish:

Shell: Steel Material ,Front Shell Tin Finished
Back Shell Tin Finished
Dimples On Plug Only

Insulator: PBT Thermoplastic, 30% Glass Filled,UL 94V-0,Black

Signal Contact: Copper Alloy, Full Gold Flash

Specification:

Contact Current Rating: 5.0 Amps

Contact Resistance: 10 mΩ Max.

Dielectric Withstanding Voltage: 1000 V Min.

Insulation Resistance: 5 GΩ Max.

Temperature: -55°C~+125°C

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

ORDER INFORMATION

DR941-SZN-xx-LF

SERIES

LEADFREE

09~37 WAY

NUT

CLIP

FEMALE

DESCRIPTION: D-SUB 90°, FEMALE , L PIECE, 9.4 mm , Machine Pin