


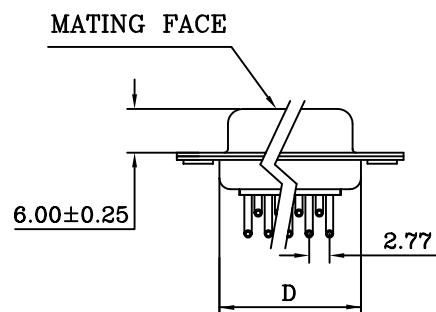
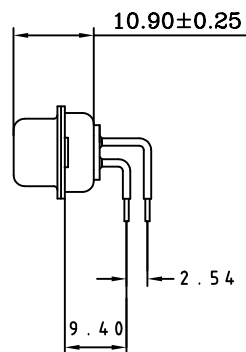


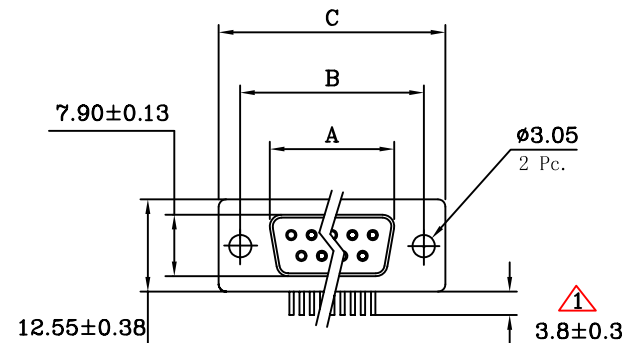


RECOMMEND P.C.B LAYOUT

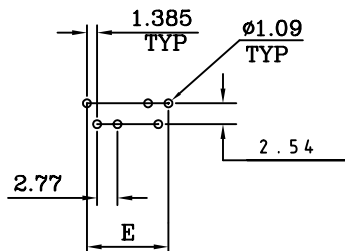


STANDARD



N



J



No. of Contact	A ±0.25	B ±0.13	C ±0.38	D ±0.25	E
09	16.33	24.99	30.81	19.28	11.08
15	24.66	33.32	39.14	27.51	19.39
25	38.38	47.04	53.04	41.28	33.24
37	54.84	63.50	69.32	57.71	49.86

MATERIALS AND FINISH

FRONT SHELL NICKEL FINISHED.

INSULATOR : PBT THERMOPLASTIC, 30% GLASS
FILLED, UL 94V-0 RATED, BLACK COLOR

CONTACT MATERIAL : BRASS

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS

CONTACT RESISTANCE : 30 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.

INSULATION RESISTANCE : 1000 MEGAOHMS MIN.

TEMPERATURE RATING : -55°C ~ +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

DR941-Sx-xx-LF

SERIES

LEADFREE

09~37 WAY

BLANK:STANDARD

N:NUT

J:JACKSCREW

FEMALE

DESCRIPTION: