
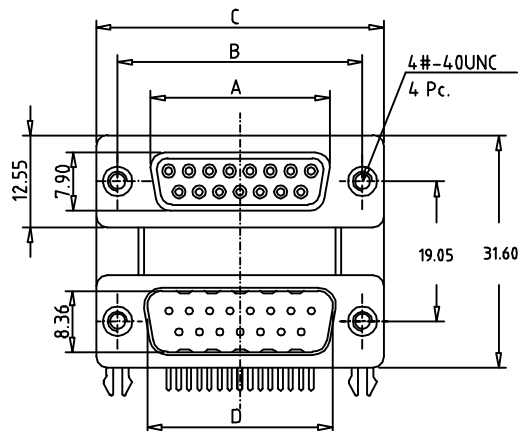



Female

No. of Contact	A ± 0.25	B ± 0.13	C ± 0.38
09	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

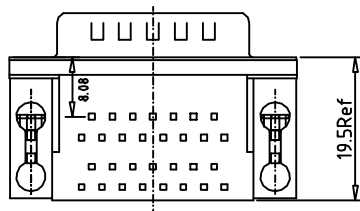

Male

No. of Contact	D ± 0.25	B ± 0.13	C ± 0.38
09	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

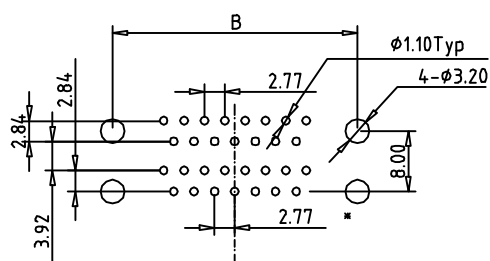

RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:


Contact Current Rating: 3 Amperes.

Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.

Insulation Resistance: 1000 Megohms Minimum

Contact Resistance: 25 Milliohms Maximum.

Operating Temperature: -55°C to +105°C.



RoHS Compliant

TOLERANCES ARE

X, $\pm$
 .X ± 0.30
 .XX ± 0.25
 .XXX ± 0.15
 ANG $\pm 2^\circ$

照片框

ORDER INFORMATION

DRB1-AN19-xxxx-LF
 SERIES NUT LEADFREE
 0909:09 TO 09WAY
 3737:37 TO 37WAY
 SPACING 19.05mm
 FEMALE TO MALE

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION