


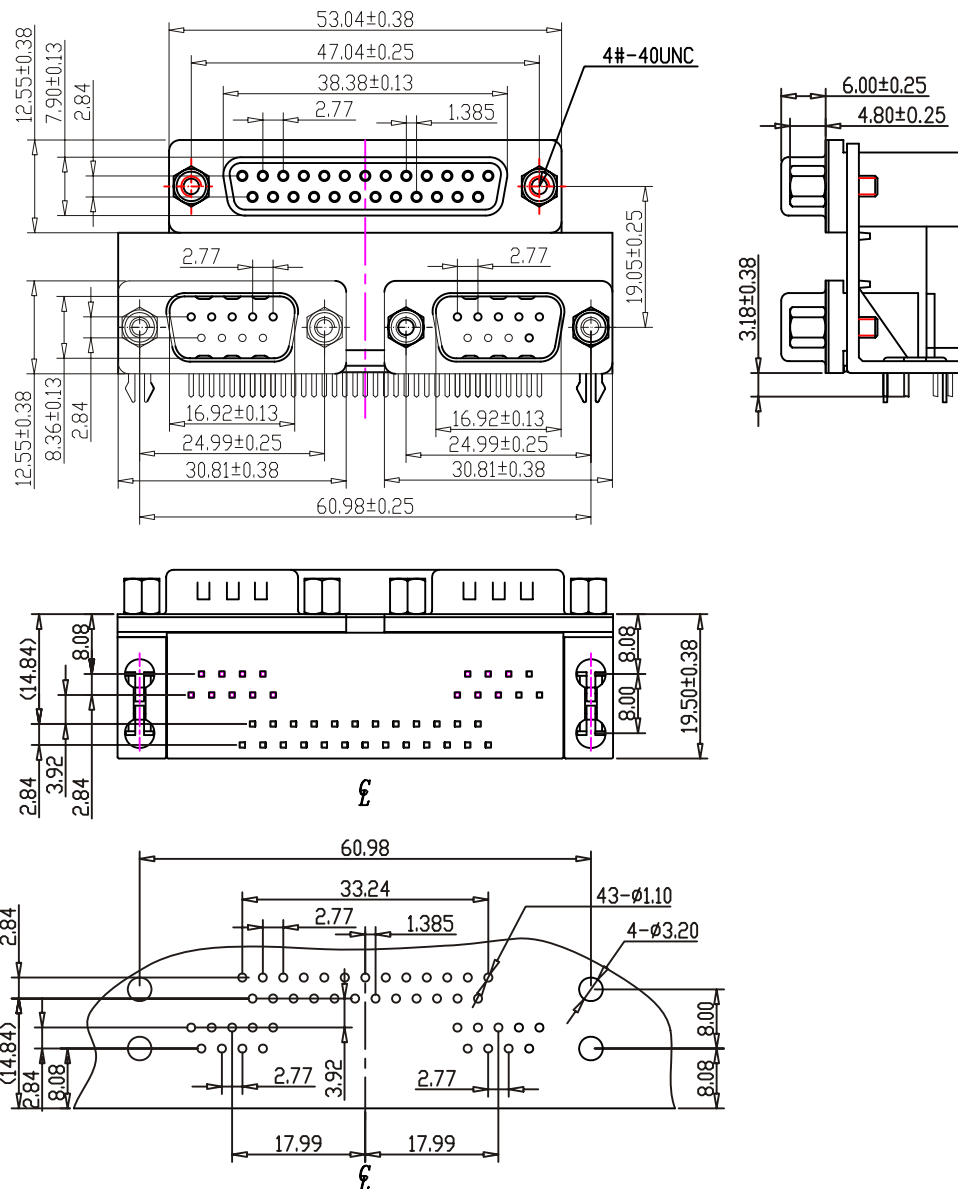

## SPECIFICATIONS

### ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.  
Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.  
Insulation Resistance:5000 Medohms Minimum.at DC 500V.  
Contact Resistance:25 Milliohms Maximum.  
Operating Temperature:-55°C to+105°C.

### MECHANICAL CHARACTERISTICS:

Contact Insertion Force:341 g.Maximum.  
Contact Separation Force:21 g.Maximum.

### MATERIALS:

Contacts:Bass.  
Insulator: PBT UL 94V-0 Rated.  
Shell:Cold Roller Steel.

### FINISHES:

Contact:Gold Flash.  
Shell:Nickel Plated.

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



### ORDER INFORMATION

DRB1-AN19J-2599-LF

SERIES  
LEADFREE  
25 TO 09/09 WAY  
JACKSCRW  
SPACING 19.05mm  
NUT  
FEMALE TO MALE

DESCRIPTION: