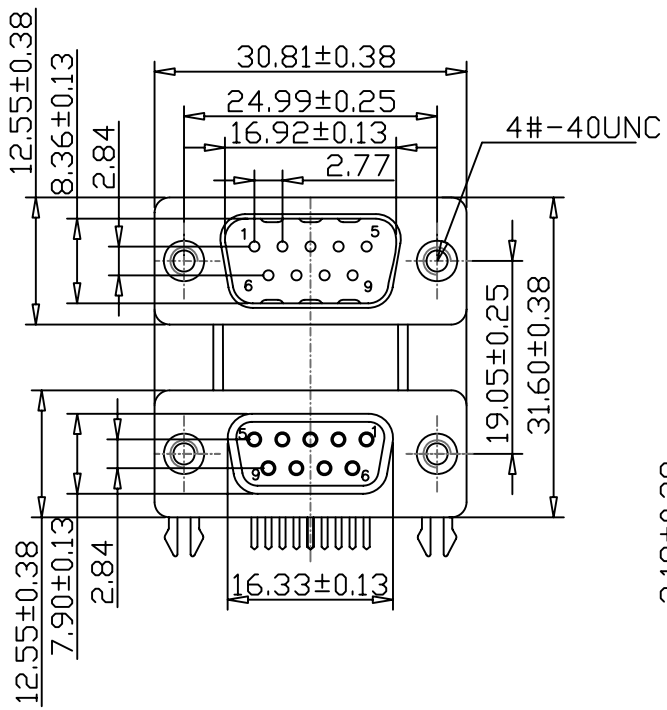

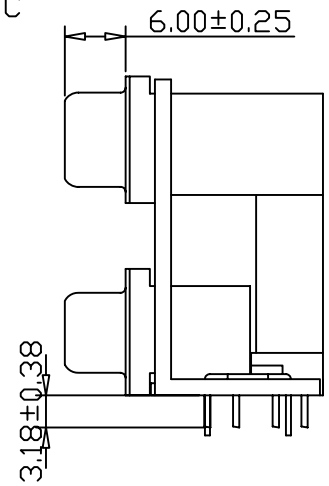

SPECIFICATIONS

ELECTRICAL CHARACERISTICS:
Contact Current Rating:5 Amperes.
Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
Insulation Resistance:5000 Medohms Minimum
Contact Resistaance:25 Milliohms Maximum.
Operating Temperature:−55°C to+105°C.

MECHANICAL CHARACTERISTICS:
Contact Insertion Force:341 g.Maximum.
Contact Separation Force:21 g.Minimum.

MATERIALS:
Contacts:Brass.
Insulator: PBT UL 94V−0 Rated.
Shell:Cold Roller Steel.

FINISHES:
Contact:Gold Flash.
Shell:Nickel Plated.

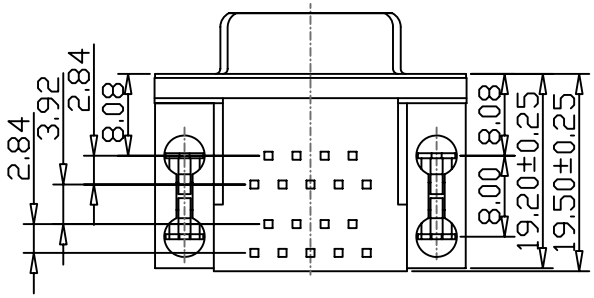

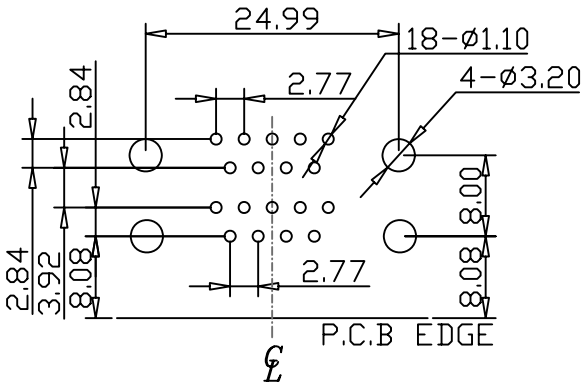

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

DRB1-EN19-0909-LF
SERIES
NUT
MALE TO FEMALE
SPACING 19.05mm
09 MALE TO 09 FEMALE
LEADFREE

DESCRIPTION: **D-SUB CONNECTOR 9 MALE/9 FEMALE DUAL PORT**