


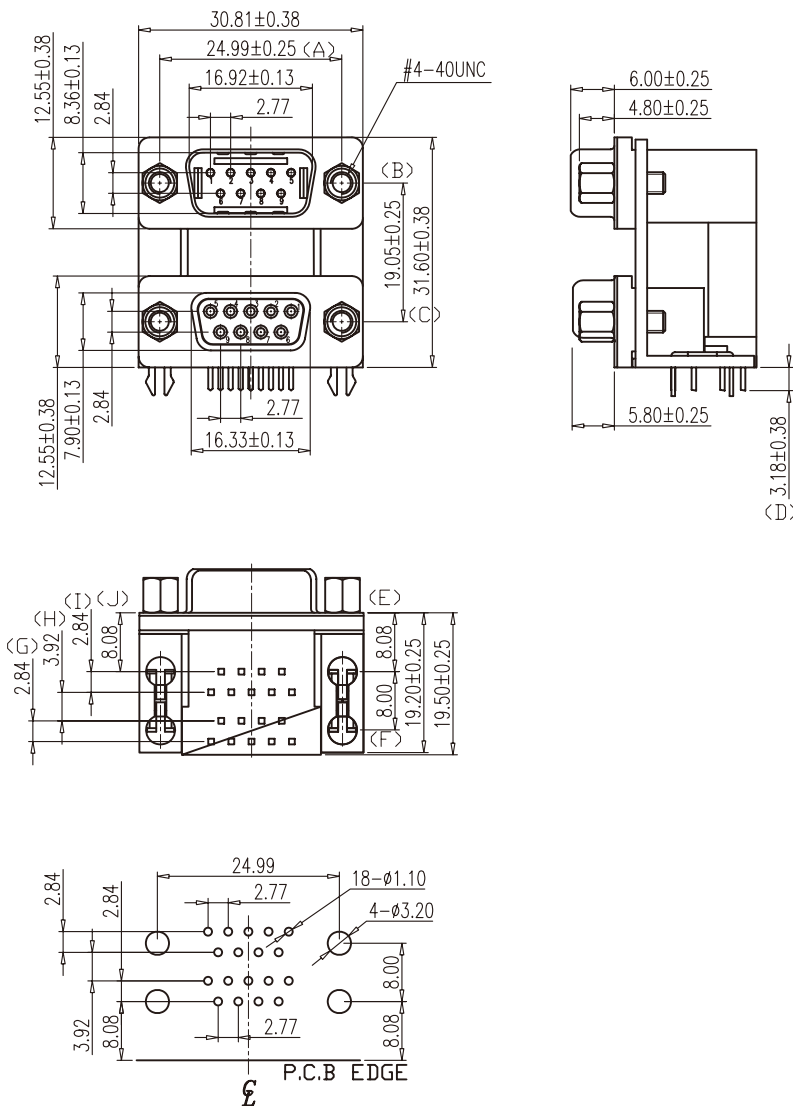

RECOMMENDED P.C.B LAYOUT

INSPECTION DIMENSION:(A)~(J)

SPECIFICATIONS

1. D-SUB

- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
- 1.6 Total Mating Force: 4.0 Kgf Max.
- 1.7 Total Unmating Force: 1.0 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

NOTES

1. MATERIAL:

Housing:PBT, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Bracket:Zinc Alloy.
Screw:Copper Alloy.

2. FINISH:

Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Bracket:Nickel Plated.
Screw:Nickel Plated.

3. This Product is LEAD-FREE & RoHS Compliance

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

DRB1-EN19J-0909-LF

SERIES

LEADFREE

09 MALE TO 09 FEMALE

JACKSCREW

SPACING 19.05mm

NUT

MALE TO FEMALE

DESCRIPTION: D-SUB CONNECTOR 9 MALE/9 FEMALE DUAL PORT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±