

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 3 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance: 5000 Megohms Minimum
 Contact Resistance: 25 Milliohms Maximum.
 Operating Temperature: -55°C to +105°C.

MECHANICAL CHARACTERISTICS:

D-SUB:

Mating Force: 5.10Kg. Maximum
 Unmating Force: 0.32Kg. Maximum

AUDIO JACK





Mating Force: 2.5Kg. Maximum
 Unmating Force: 0.30Kg. Maximum

MATERIALS:

Contacts: Brass.
 Insulator: PBT UL 94V-0 Rated.
 Shell: Cold Roller Steel.

FINISHES:

Contact: Gold Flash.
 Shell: Nickel Plated.

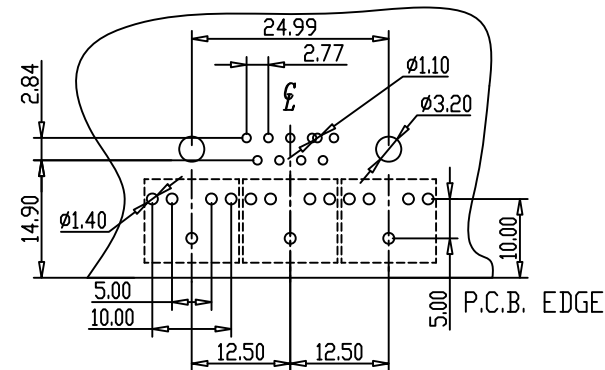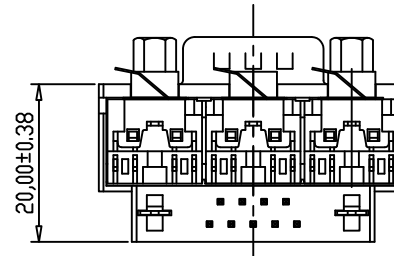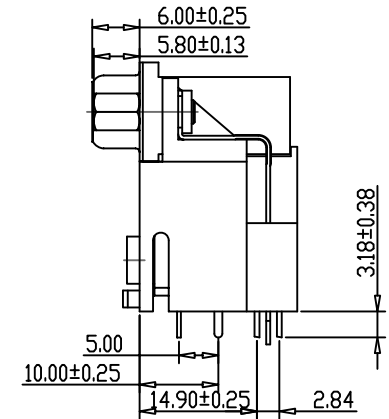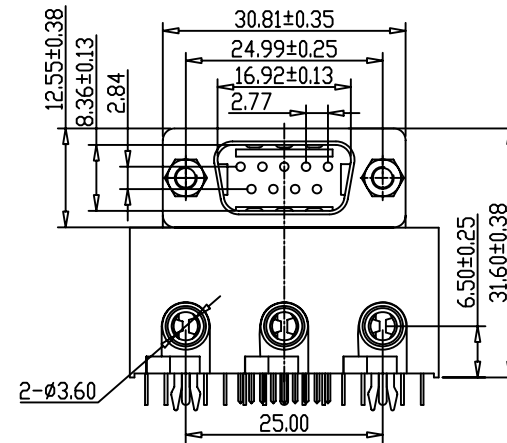

RECOMMENED P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

DRB1-ENJ-09P3-LF

SERIES

LEADFREE

09 MALE TO 3 PCS JACK

JACKSCREW

NUT

MALE TO FEMALE

DESCRIPTION: D-SUB 09 MALE/ 3 PCS AUDIO JACK HIGH RAISE