

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:5 Amperes.

Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.

Insulation Resistance:5000 Medohms Minimum

Contact Resistance:25 Milliohms Maximum.

Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force:341 g.Maximum.

Contact Separation Force:21 g.Minimum.

MATERIALS:

Contacts:Brass.




Insulator: PBT UL 94V-0 Rated.

Shell:Cold Roller Steel.

FINISHES:

Contact:Gold Flash.

Shell:Nickel Plated.

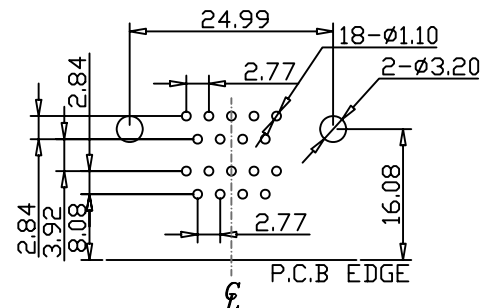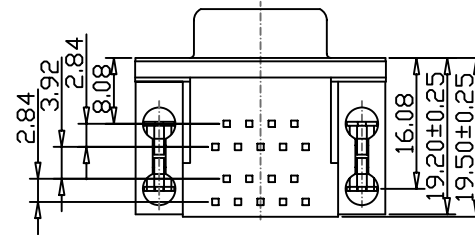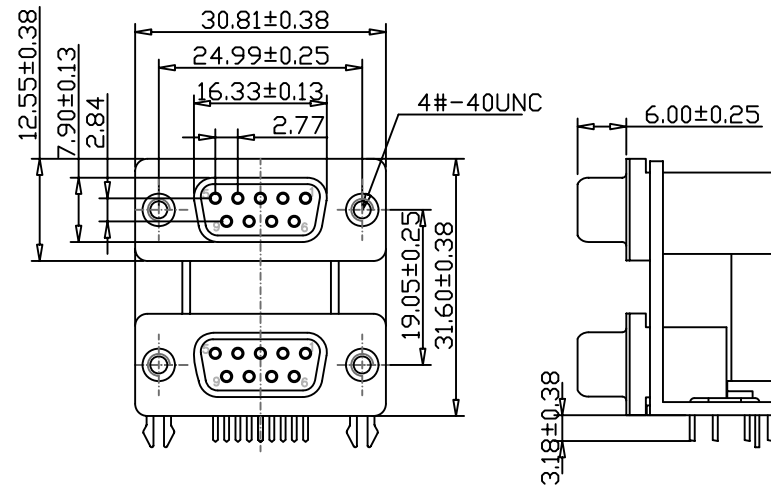

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

DRB1-FN19-0909-LF

SERIES

LEADFREE

09 MALE TO 09 FEMALE

SPACING 19.05mm

NUT

FEMALE TO FEMALE

DESCRIPTION: D-SUB CONNECTOR 9 FEMALE/9 FEMALE DUAL PORT