
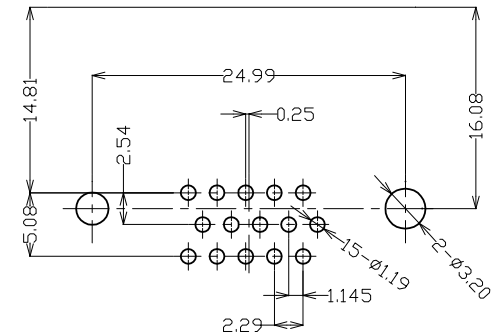
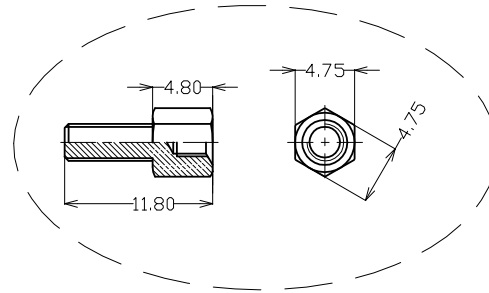
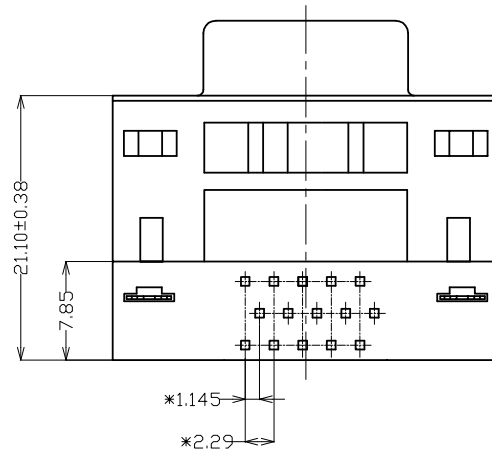
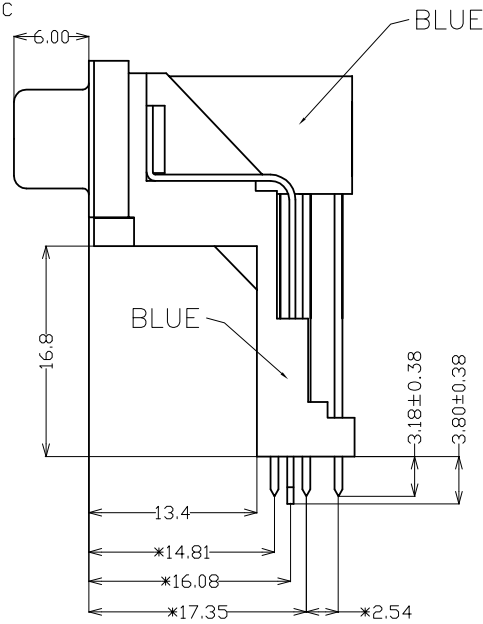


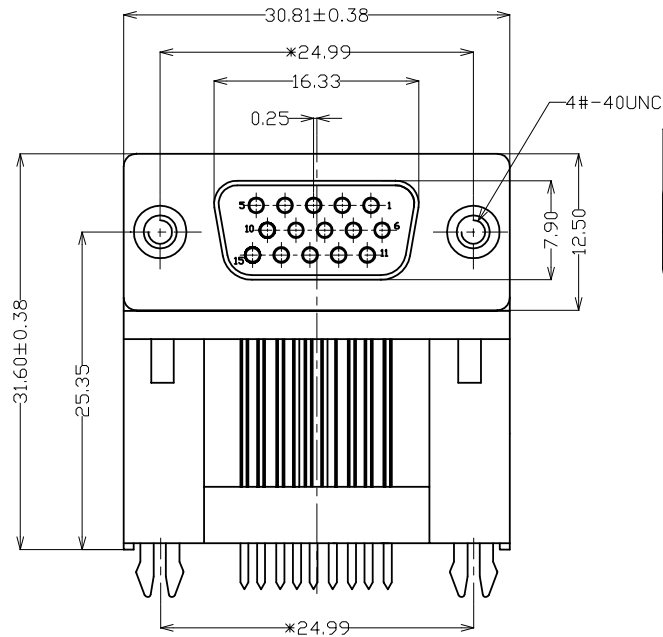

P.C.B. LAYOUT (TOLERANCE ±0.05)
TOP VIEW

MATERIAL:
HOUSING: PBT 661C (BLUE)
CONTACT: BRASS
BOARD LOCK: SK7
SQUARE RIVET: BRASS
SCREW: BRASS
SHELL: SPCC
ELECTRICAL CHARACTERISTICS:
RATED CURRENT: 5A
RATED VOLTAGE: 300V DC
INSULATION RESISTANCE: 1000M OHMS MIN. AT 500V
CONTACT RESISTANCE: 30m OHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR ONE MINUTE
OPERATING TEMPERATURE: -55°C TO +105°C

FINISH:
SHELL: NICKEL PLATED
CONTACT: GOLD PLATED IN CONTACT AREA
TIN PLATED IN SOLDER AREA
BOARD LOCK: TIN PLATED
SQUARE RIVET: NICKEL PLATED
SCREW: NICKEL PLATED
ACCORD ROHS COMPLIANCE

"*" 標示是重點管控尺寸

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

DRB1-FNHBL-3500-LF

SERIES 15 WAY LEADFREE
BLUE
FEMALE HEX SCREW
NUT

DESCRIPTION: HDR15母高腳鉚附半金藍 二魚叉 661C 螺絲4.8 8 RoHS