


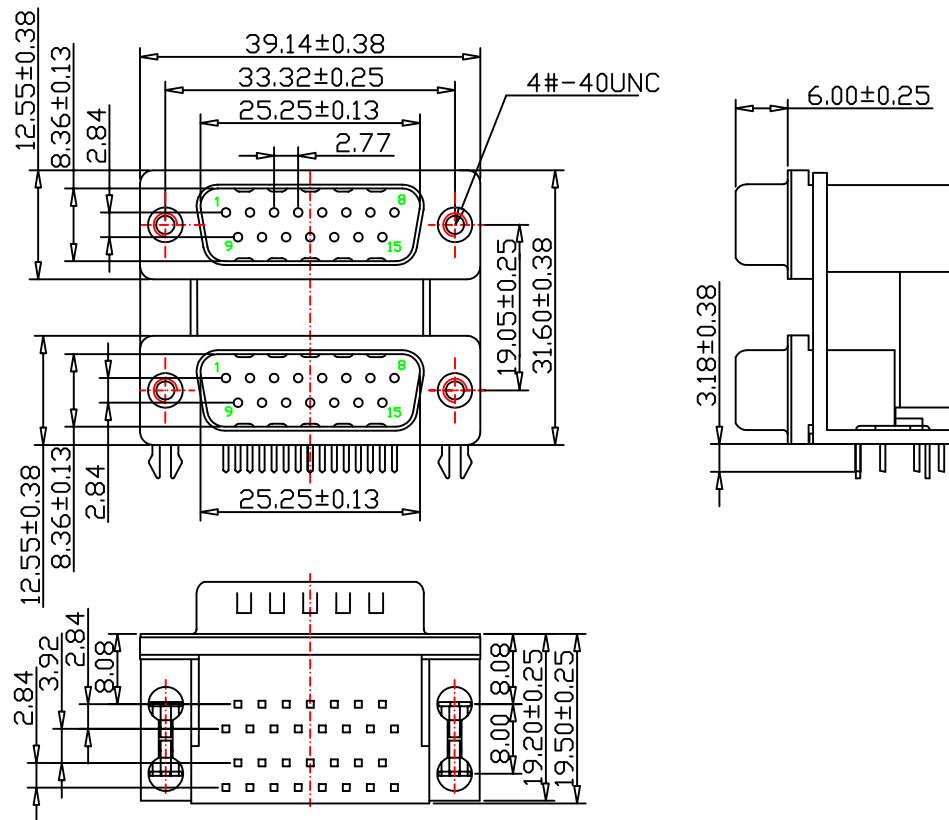

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 5 Amperes.

Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.

Insulation Resistance: 5000 Medohms Minimum

Contact Resistance: 25 Milliohms Maximum.

Operating Temperature: -55°C to $+105^{\circ}\text{C}$.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force: 341 g. Maximum.

Contact Separation Force: 21 g. Minimum.

MATERIALS:

Contacts: Brass.


Insulator: PBT UL 94V-0 Rated.

Shell: Cold Roller Steel.

FINISHES:

Contact: Gold Flash.

Shell: Nickel Plated.

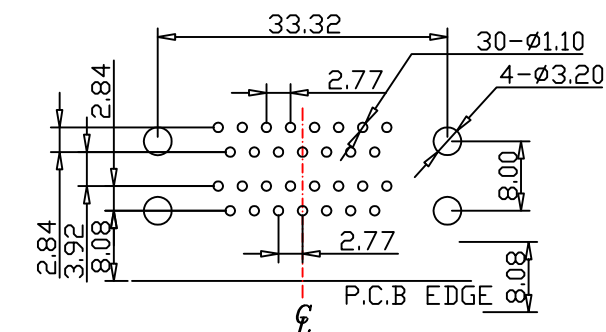

RECOMMENDED P.C.B LAYOUT

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

ORDER INFORMATION

DRB1-MN19-1515-LF

SERIES

LEADFREE

15 TO 15 WAY

SPACING 19.05mm

NUT

MALE TO MALE

DESCRIPTION: D-SUB CONNECTOR 15 MALE/15 MALE DUAL PORT