
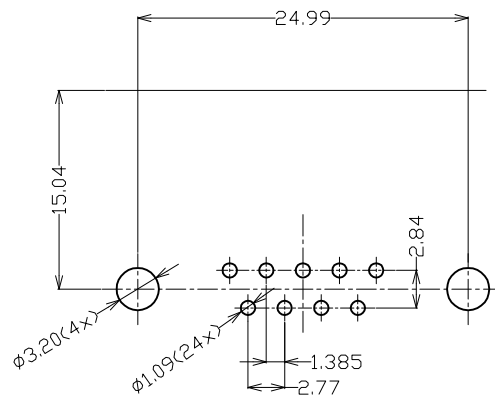
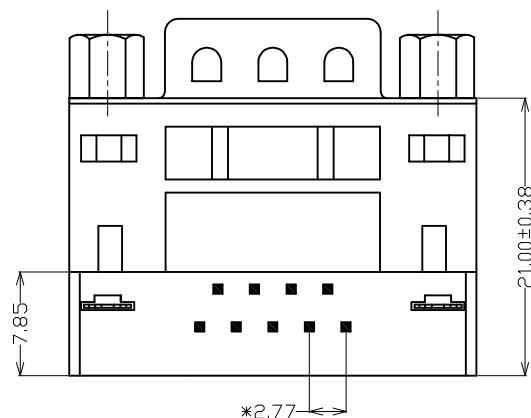
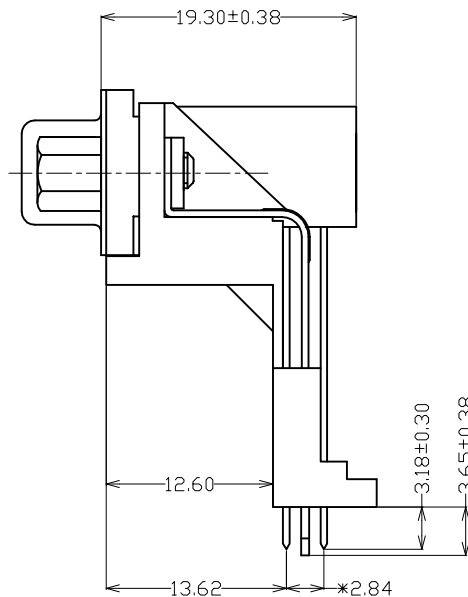


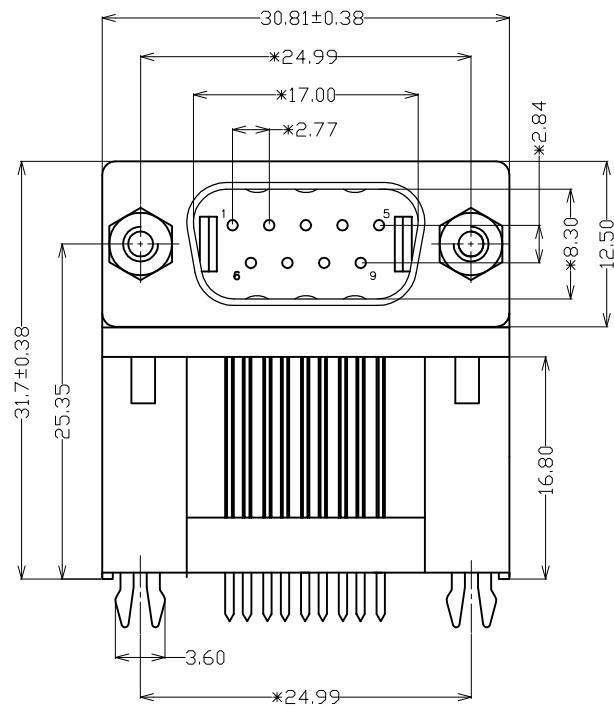

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIAL:
HOUSING: PBT 藍色661C.
CONTACT: BRASS.
HARPOON: SK7.
SQUARE RIVET: BRASS.
SHELL: SPCC.

ELECTRICAL CHARACTERISTICS:
RATED CURRENT: 5A
RATED VOLTAGE: 300V DC
INSULATION RESISTANCE: 1000M OHMS MIN. AT 500V.
CONTACT RESISTANCE: 30m OHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:
1000V AC FOR ONE MINUTE.
OPERATING TEMPERATURE: -55°C~+105°C.

FINISH:
SHELL: 30μ" MIN, PLATED OVERALL.
CONTACT: GOLD PLATED ON CONTACT AREA,
100μ" MIN, TIN PLATED ON SOLDER TALS.
50μ" MIN, NICKEL PLATED UNDER OVERALL.
BOARD LOCK: TIN PLATED OVERALL.
SQUARE RIVET: NICKEL PLATED OVERALL.

* 標示是重點管控尺寸

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

DRB1-MNJ-0900-LF

SERIES T LEADFREE
09 WAY
JACKSCREW
NUT
MALE

DESCRIPTION: DR9公高腳叉鉚半金綠 322C 綠膠芯 黑支架二魚叉 RoHS