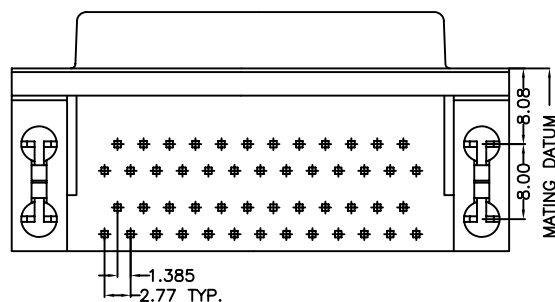
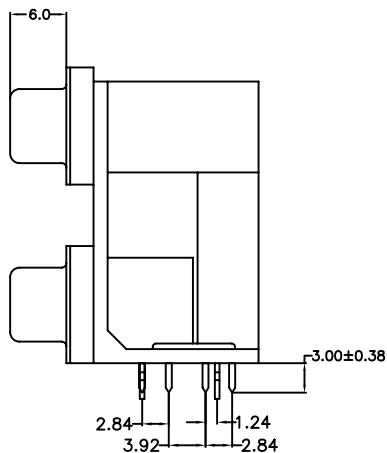
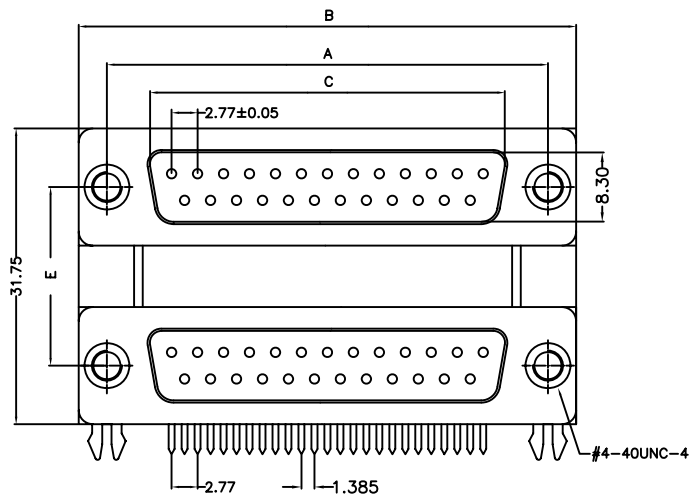


RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

MATERIALS

1.HOUSING : THERMOPLASTIC (UL 94V-0).

2.TERMINAL : COPPER ALLOY.

3.SHELL : STEEL.

SPECIFICATION

1.CURRENT RATING : 5 AMP. MAX.

2.DIELECTRIC WITHSTANDING VOLTAGE :
1000V AC R.M.S. FOR ONE MINUTE.

3.INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.

4.CONTACT RESISTANCE : 30m OHMS MAX.

5.OPERATING TEMPERATURE : -55°C TO+105°C.

6.DURABILITY : 500 CYCLES.

PART NO.	Dimension			
	A	B	C	E
DRB1-MN15-0909	25.00	30.80	16.92	15.88
DRB1-MN15-1515	33.32	39.20	25.25	
DRB1-MN15-2525	47.04	53.10	38.96	
DRB1-MN15-3737	63.50	69.40	55.42	
DRB1-MN19-0909	25.00	30.80	16.92	19.05
DRB1-MN19-1515	33.32	39.20	25.25	
DRB1-MN19-2525	47.04	53.10	38.96	
DRB1-MN19-3737	63.50	69.40	55.42	
DRB1-MN22-0909	25.00	30.80	16.92	22.86
DRB1-MN22-1515	33.32	39.20	25.25	
DRB1-MN22-2525	47.04	53.10	38.96	
DRB1-MN22-3737	63.50	69.40	55.42	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DRB1-MNxx-xxxx-LF

SERIES

MALE TO MALE

LEADFREE
0909:09 TO 09WAY
3737:37 TO 37WAY
15:SPACING 15.88mm
19:SPACING 19.05mm
22:SPACING 22.86mm

DESCRIPTION: 雙層25公雙排叉鉚半金黑8. 1