


Material:
Insulator: PBT+30% Glass Fiber (UL94V-0).
Contact: Copper Alloy.
Contact Plated: Gold
Shell: Steel with Nickel or Tin or Zinc Plated.


Specification:
Current Rating: 5 Amps.
Withstanding Voltage: AC 500V for 1 Minute.
Insulation Resistance: 1000MΩ Min. at DC 500V.
Contact Resistance: 15mΩ Max..
Operating Temperature: −40℃ ~ +105℃.

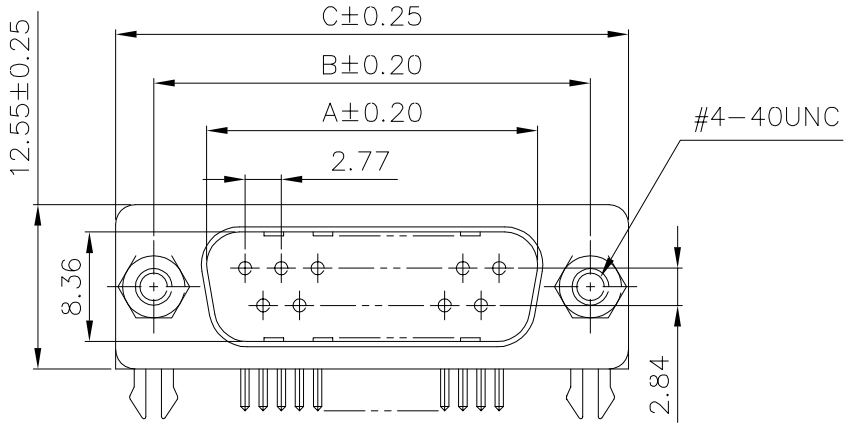


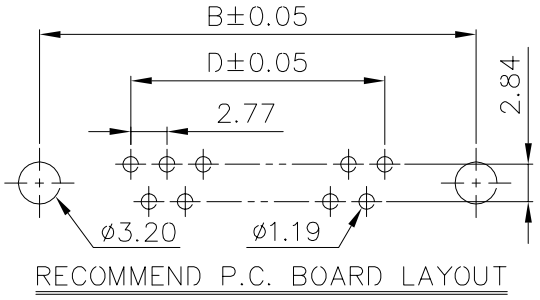

RECOMMEND P.C. BOARD LAYOUT

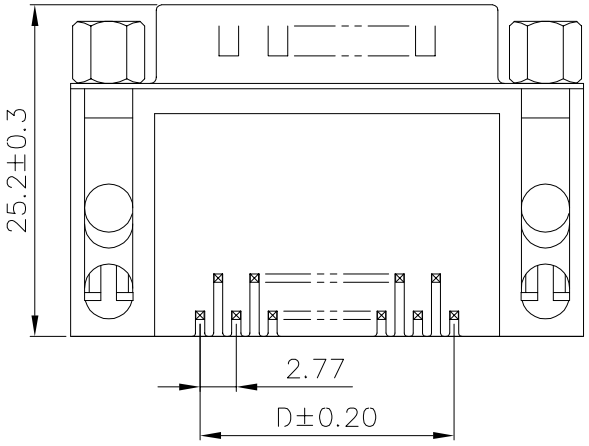

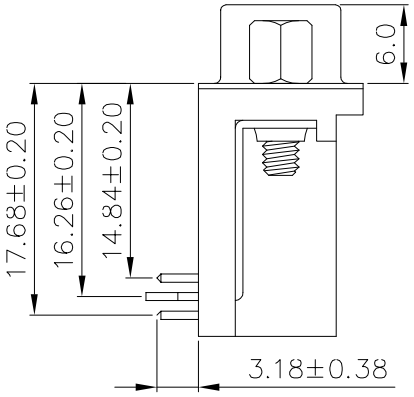

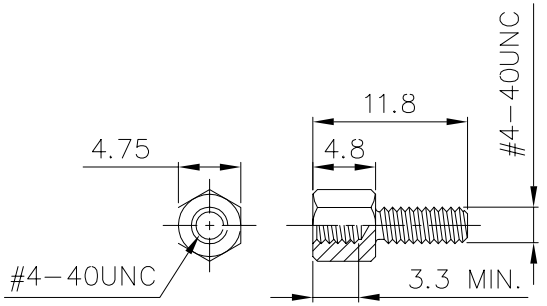

LOCKING SCREW

Pos.	Dim. A	Dim. B	Dim. C	Dim. D
9	16.92	24.99	30.81	11.08
15	25.25	33.32	39.14	19.39
25	38.96	47.04	53.04	33.24
37	55.42	63.50	69.32	49.86

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

DRL-PG-xx-LF
SERIES
GOLD
MALE
09~37 WAY
LEADFREE

DESCRIPTION: D-Sub Male Right Angle Connector Footprint 14.84mm Screw Lock Type