


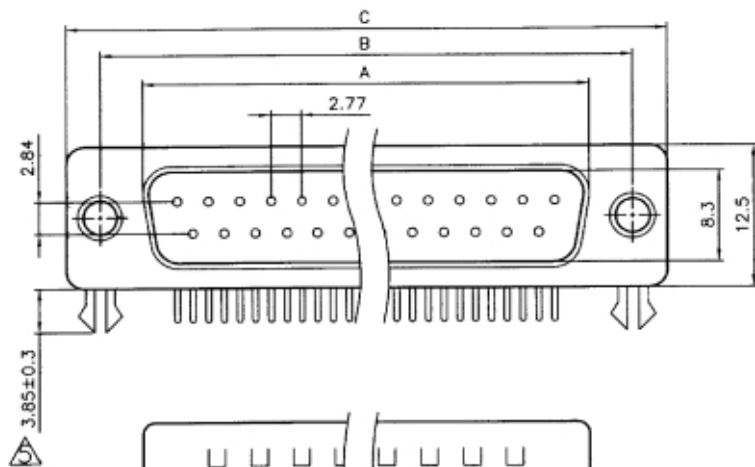
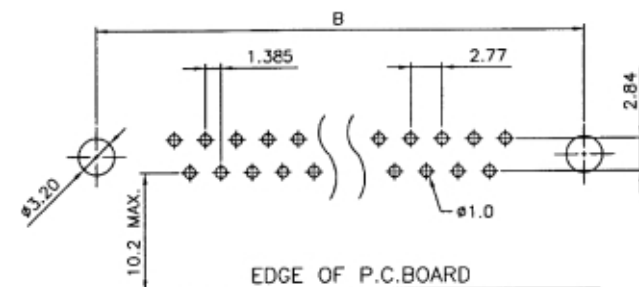


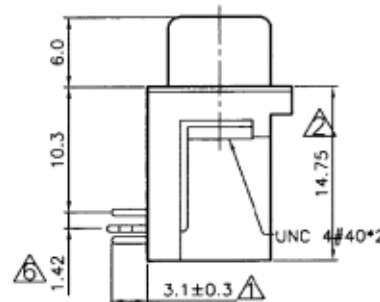

POSITION	A	B	C
DRM-PGNH-09	16.92	25.00	30.8
DRM-PGNH-15	25.25	33.30	39.2
DRM-PGNH-25	38.96	47.10	53.1
DRM-PGNH-37	55.42	63.50	69.4

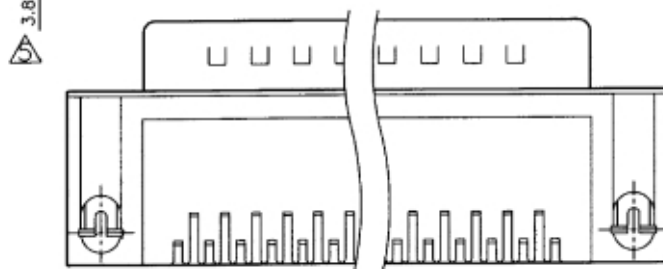

RECOMMENDED P.C.B LAYOUT (TOP VIEW)
TOLERANCES: $\pm 0.05\text{mm}$



△ SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Shell: Steel

Rivet, Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u"~100u" Nickel

Contact Area: 1u"~30u" Selective Gold

Solder Tails Area: 100u"~200u" Tin/Lead (Brighten Tin) or

100u"~200u" Tin/Lead Free (Brighten Tin/Matte Tin)

ELECTRICAL

Operation Voltage: 250 VAC Max.

Current Rating: 3 Amps

Contact Resistance: 15 mohms

Insulation Resistance: 3000 Mohms Min @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / Minute

Temperature Range: -55°C TO +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

照片框

ORDER INFORMATION

DRM-PGNH-xx-LF
SERIES | T | T | T | T | LEADFREE
09-37 WAY
HEX SCREW
NUT
FULL GOLD
MALE

DESCRIPTION: