
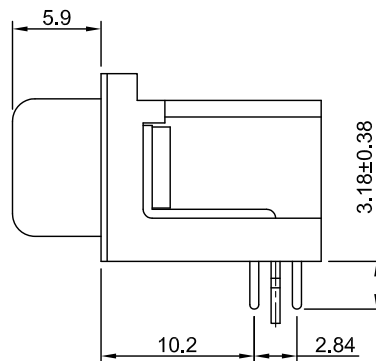


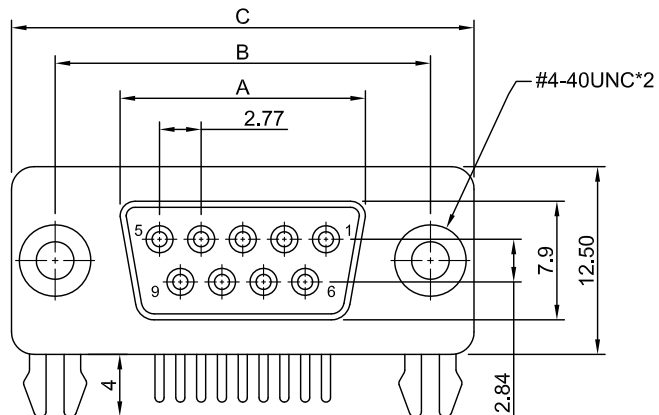

MATERIAL:

INSULATOR : THERMOPLASTIC, UL 94V-0.

SANDARD : PBT.

CONTACT : COPPER ALLOY.

CONTACT FINISH : GOLD OVER NICKEL.

SHELL : STEEL.

BOARDLOCK : STEEL, TIN PLATED.

RIVETED INSERT : BRASS,NICKEL PLATED.

SPECIFICATION:



CURRENT RATING : 5 AMP

DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.

CONTACT RESISTANCE : 15mΩ MAX.

OPERATING TEMPERATURE : -55°C ~ +105°C.

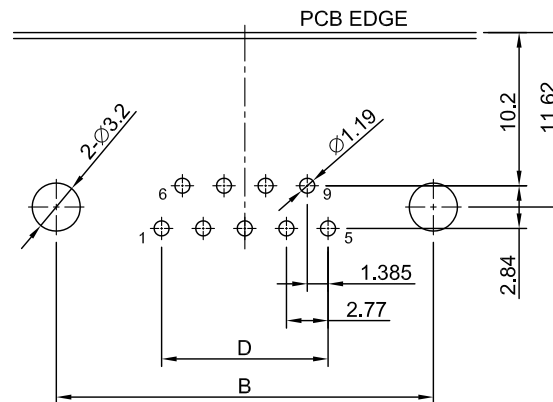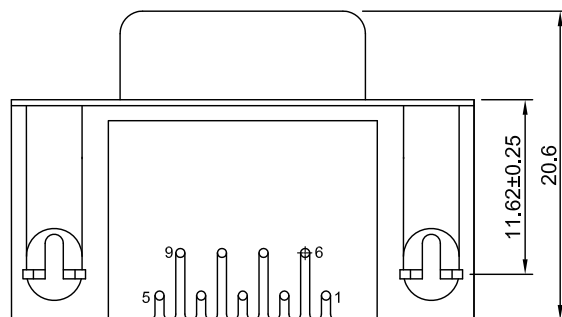

POSITION	A ± 0.20	B ± 0.20	C ± 0.38	D
09 PIN	16.30	25.00	30.80	11.08
15 PIN	24.60	33.30	39.20	19.39
25 PIN	38.35	47.05	53.05	33.24
37 PIN	54.80	63.50	69.40	49.86

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

DRM-SGN-xx-LF
SERIES | LEADFREE
09~37 WAY
NUT
FULL GOLD
FEMALE

DESCRIPTION: