


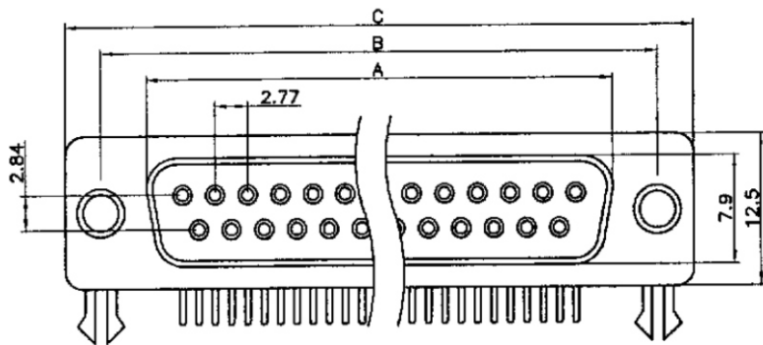

POSITION	A	B	C
9F	16.30	25.00	30.8
15F	24.60	33.30	39.2
25F	38.30	47.10	53.1
37F	54.80	63.50	69.4

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Shell: Steel

Rivet, Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u" Nickel

Contact Area: 1u"~30u" Selective Gold

Solder Tails Area: 100u" Tin/Lead(Brighten Tin)or

100u" Tin/Lead Free(Brighten Tin/Matte Tin)

ELECTRICAL

Operation Voltage: 250 VAC Max.




Current Rating: 3 Amps

Contact Resistance: 15 Mohms

Insulation Resistance: 3000 Mohms Min @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / Minute


Operating Temperature: -55°C TO +105°C

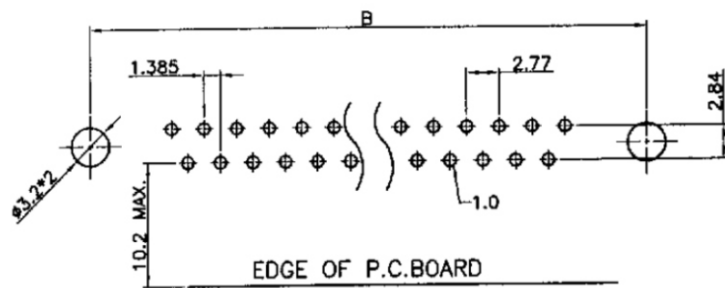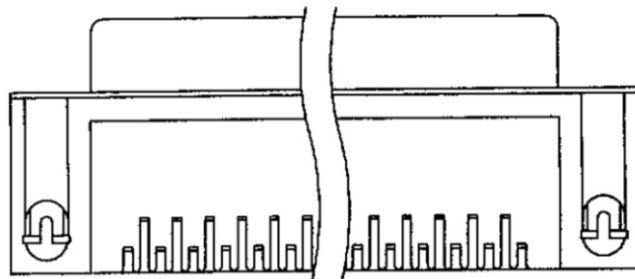

RECOMMENDED P.C.B LAYOUT (TOP VIEW)

TOLERANCES: $\pm 0.05\text{mm}$

PARTS DIMENSION TABLE



parts no.	DIM. a	DIM. b	inner thread
J	4.8	11.8	4#40
L	5.8	12.0	4#40
N	4.8	11.8	M3
Q	5.8	12.0	M3

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, $\pm$

CHECKED BY GENIUS

.X, $\pm$

UNIT / mm

SCALE 1 : 1

.XX, $\pm$

DATE

.XXX, $\pm$

ANG, $\pm$

SIZE A4

PPOJECTION

ORDER INFORMATION

DRM-SGNHM3-xx-LF

SERIES

LEADFREE

09~37 WAY

HEX SCREW M3#

NUT

FULL GOLD

FEMALE

DESCRIPTION: D-SUB 0.409"(10.40mm) FOOTPRING, RIGHT ANGLE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com