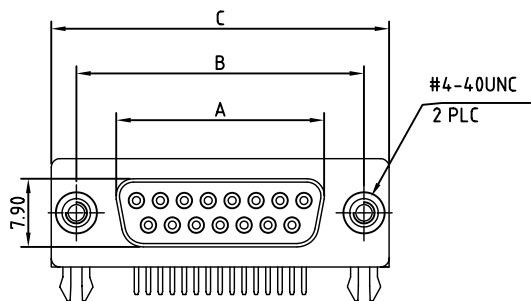


Note

No.	A	B	C
09	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.83	63.50	69.32





ELECTRICAL CHARACTERISTICS

Contact Current Rating: 3Amperes.
 Dielectric Withstanding Voltage:AC 500V at sea level.
 Insulation Resistance:1000Megohms Min.
 Contact Resistance:30Milliohms Max.
 Operation Temperature : -55°C to +105°C.

Material

Contact :Copper Alloy.
 Insulator:PBT. [Select PA6T /LCP /PA9T]
 Shell: SPCC.
 Z-Piece: Copper Alloy.
 Screw: Copper Alloy.
 Rivet: Copper Alloy. or Zinc.

Recommend PCB Layout

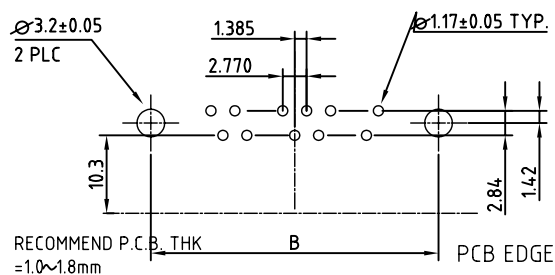

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ± 0.30
 .XX ± 0.25
 .XXX ± 0.15
 ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

DRM-SGxx-xx-LF

SERIES | | LEADFREE
 09~37 WAY

FEMALE | N:NUT
 FULL GOLD | NH:NUT+HEX SCREW
 NJ:NUT+JACKSCREW

DESCRIPTION: