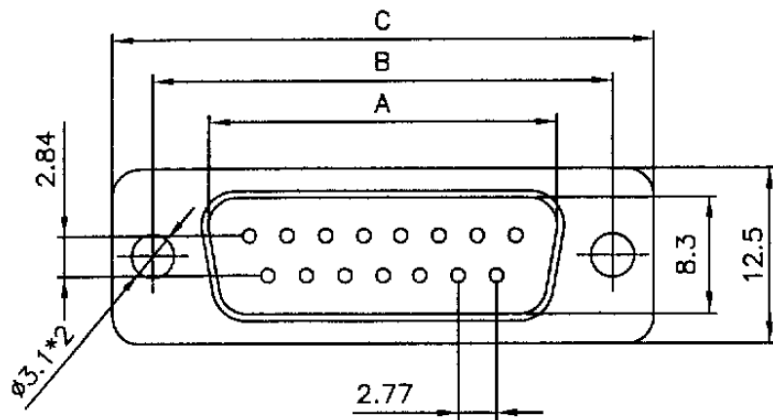


SPECIFICATION

MATERIAL

△ Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Shell: Steel

Rivet, Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u" Nickel

Contact Area: 1u"~30u" Selective Gold

Solder Tails Area: 100u" Tin/Lead(Brighten Tin) or
100u" Tin/Lead Free(Brighten Tin/Matte Tin)

ELECTRICAL

Operation Voltage: 250 VAC max.

Current Rating: 3 Amps max.

Contact Resistance: 15 mohms max.

Insulation Resistance: 3000 Mohms min @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / minute

Operating Temperature: -55°C TO +105°C

POSITION	A	B	C	D
9	16.92	25.00	30.8	19.2
15	25.25	33.30	39.2	27.7
25	38.96	47.10	53.1	41.1
37	55.42	63.50	69.4	57.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1:1

.XX ± 0.20

DATE

.XXX ±

ANG ± 5°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

DSF-Px-xx-LF
SERIES T LEADFREE
09~37WAY
G:GOLD
S:SEMI GOLD
MALE

DESCRIPTION: