

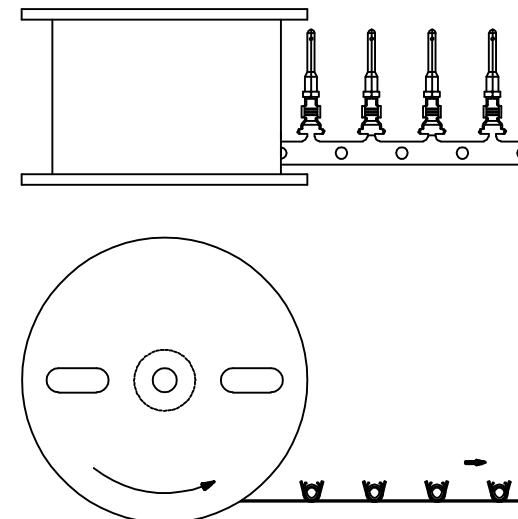
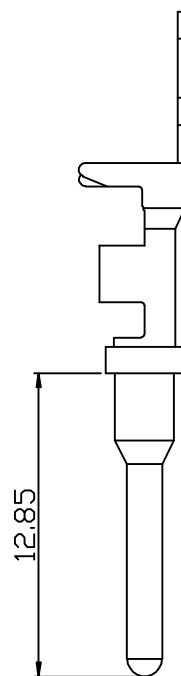
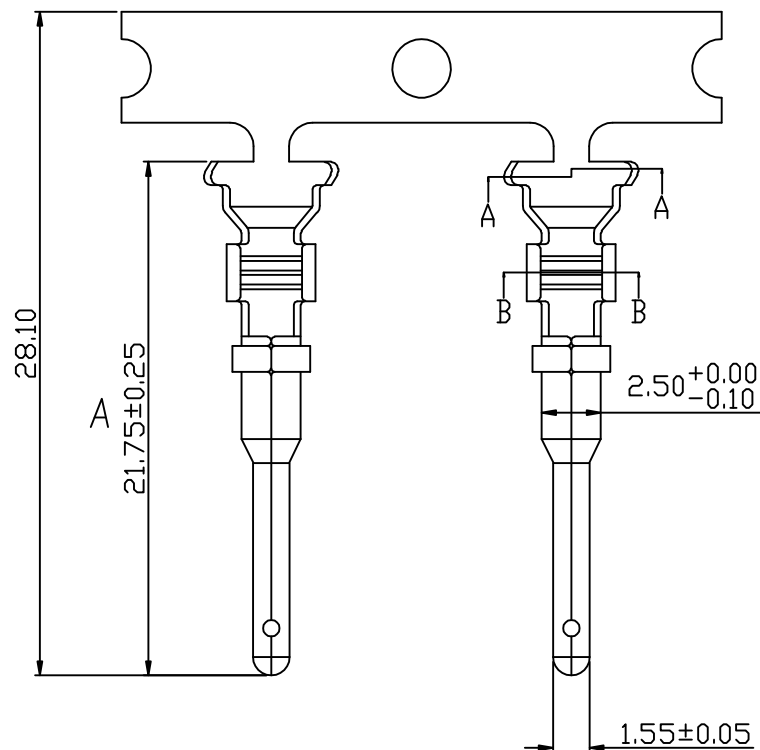




PULL OUT DIRECTION

TABLE A

DT16-MT-14	3.4	防水頭9PIN(M)端子(ø3.3*21.75)(Crimp PIN 短線夾) (14~18AWG)	MATTE TIN 80u"
			SOURCE MATERIAL
DT16-MT-12	4.6	防水頭9PIN(M)端子(ø3.3*21.75)(Crimp PIN) (12~14AWG)	MATTE TIN 80u"
			SOURCE MATERIAL
P/N	L	TITLE	FINISH



1. MATERIAL :
1-1. CONTACT : PHOSPHOR BRONZE
2. FINISH :
2-1. CONTACT : SEE TABLE A
UNDERPLATED : NICKEL 60u" ON OVER ALL

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

DT16-MT-xx-LF

SERIES
LEADFREE
12:12~14 AWG
14:14~18 AWG
TIN
MALE TERMINAL

DESCRIPTION: