
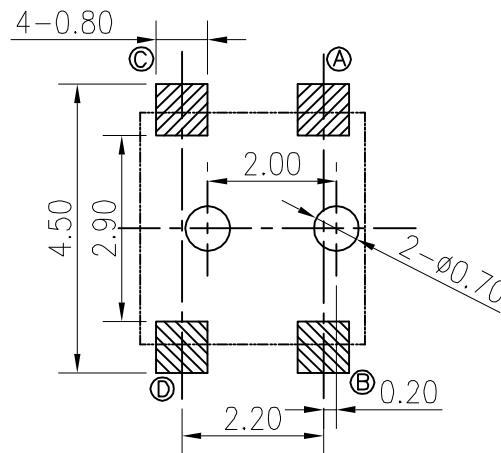


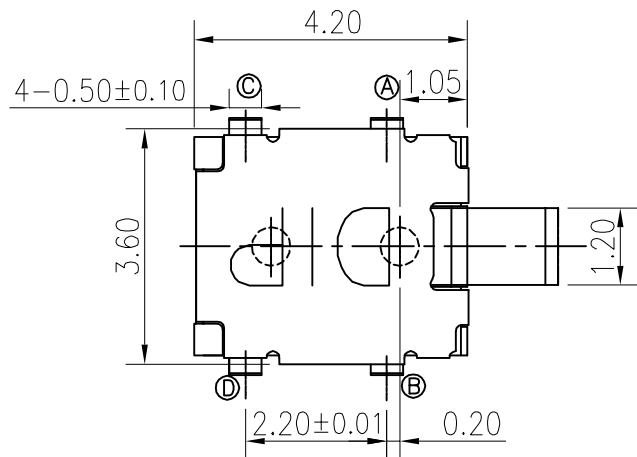




P.C.B LAYOUT

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. GENERAL TOLERANCES $\pm 0.2\text{mm}$.

SPECIFICATIONS:

1. RATING: $100\mu\text{A}$ 3V DC to 1mA 5V DC
2. LIFE: 50,000 CYCLES.
3. OPERATING FORCE: 35gf MAX.
4. INITIAL CONTACT RESISTANCE: 3Ω Max.
5. DIELECTRIC STRENGTH: AC 100V 1 MINUTE.
6. INSULATION RESISTANCE: $100\text{M}\Omega$ Min.
7. OPERATING TEMPERATURE: -40°C to $+85^\circ\text{C}$.

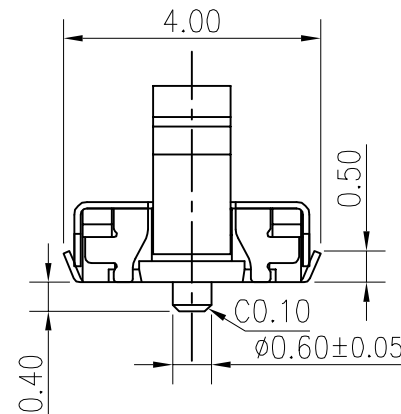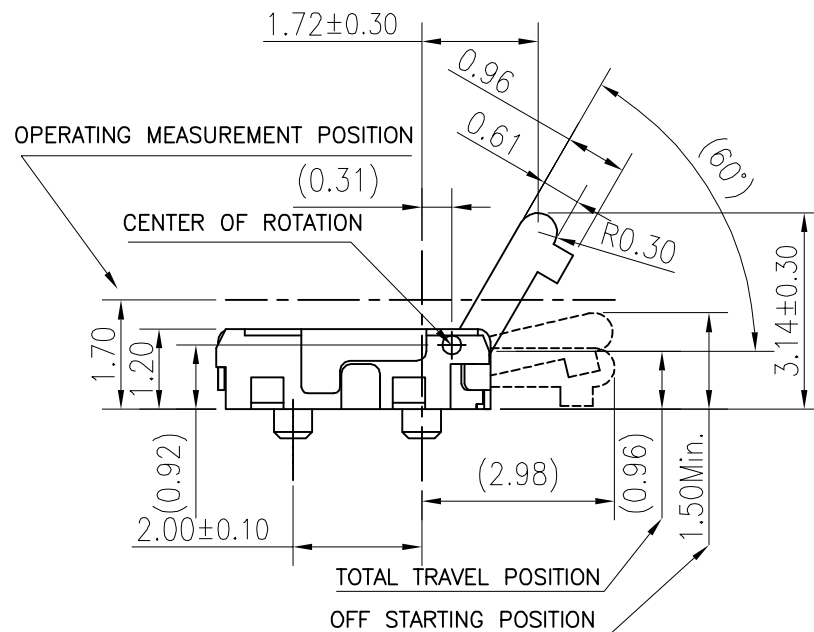

CIRCUIT DIAGRAM

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DTSW-W012P-04-LF

SERIES

LEADFREE

04 WAY

POST

HIGH 1.2mm

90° SMT

DESCRIPTION: Detector Switch