


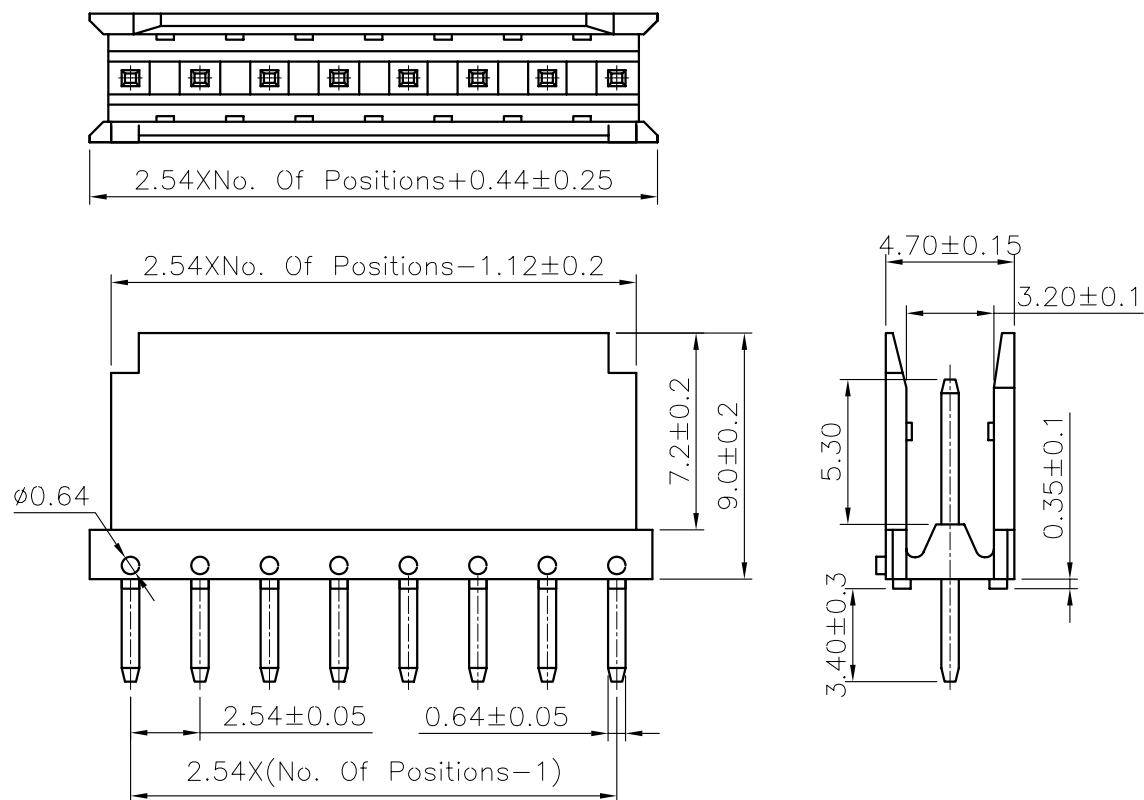

Specifications:


Current rating:3.0A DC Max
 Voltage rating:250V DC Max
 Contact tesistance:20m ohm Max
 Insulation resistance:1000M ohm Min
 Withstanding voltage:600V AC/minute
 Operating temperature Range:-40°C ~ +105°C
 Materials:

Insulator:Hight Temp. Plastic(UL94V-0)

Contact material:Copper Alloy

Plating:Selective Gold Plated 30u"

Retention Force:1kg

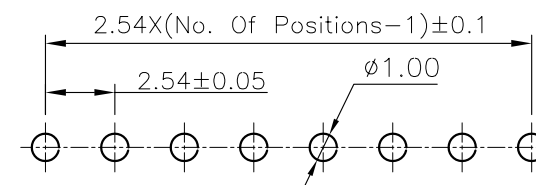

P.C.B. Layout

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DUB-DS30-1Xxx-LF
 SERIES LEADFREE
 1X03:03 WAY
 1X20:20 WAY
 SEMI GOLD 30u"
 DIP 180°

DESCRIPTION: 2.54mm Wire to Board Wafer Single Row