

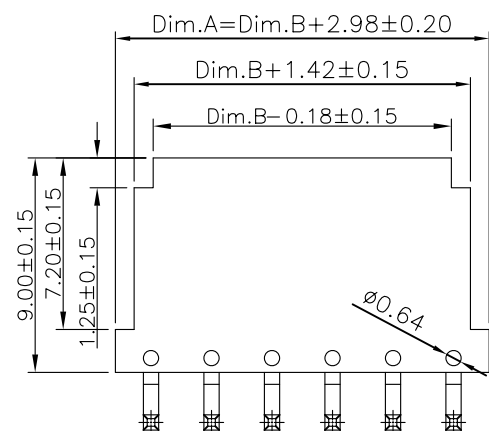
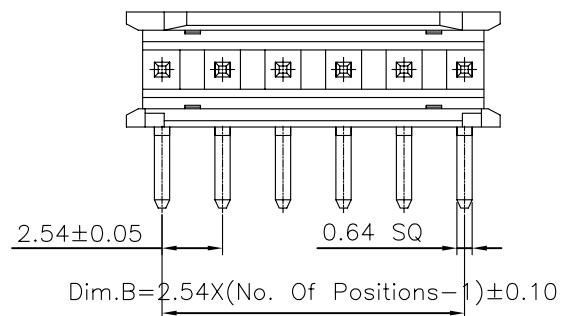


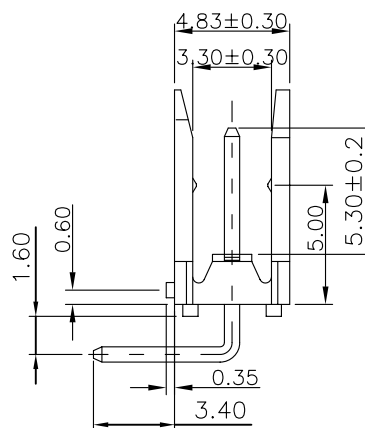

$$\text{Dim.B} = 2.54 \times (\text{No. Of Positions} - 1) \pm 0.10$$

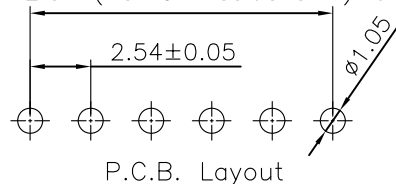

Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:600V AC/minute

Operating Temperature Range:-25°C ~ +105°C

Material and Finish

Insulator:High Temp. Plastic(Nylon46 UL94V-0)

Insulator Color:Black

Contact:Brass

Plating:Gold Plated

Pin No.	DIM:(mm)		Pin No.	DIM:(mm)		Pin No.	DIM:(mm)	
	A	B		A	B		A	B
03	8.06	5.08	09	23.30	20.32	15	38.54	35.56
04	10.60	7.62	10	25.84	22.86	16	41.08	38.10
05	13.14	10.16	11	28.38	25.40	17	43.62	40.64
06	15.68	12.70	12	30.92	27.94	18	46.16	43.18
07	18.22	15.24	13	33.46	30.48	19	48.70	45.72
08	20.76	17.78	14	36.00	33.02	20	51.24	48.26

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DUB-Rx-1Xxx-LF
SERIES LEADFREE
1X03:03 WAY
1X20:20 WAY
T:TIN
G: GOLD
DIP 90°

DESCRIPTION: 2.54mm Wire to Board Wafer Straight Type