
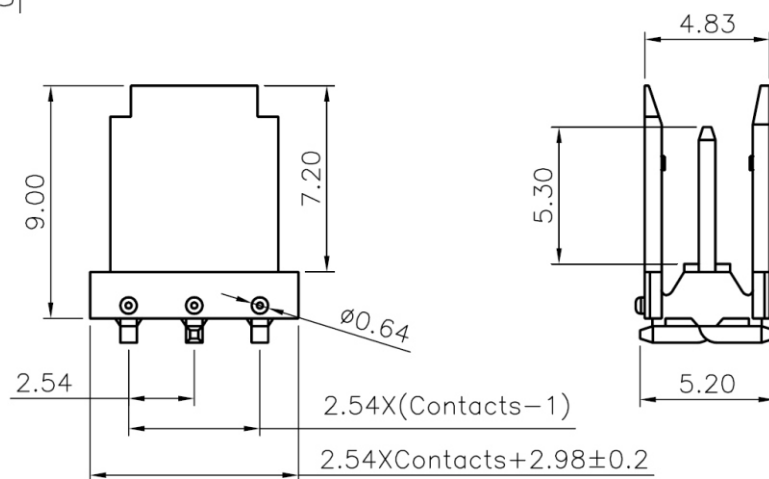
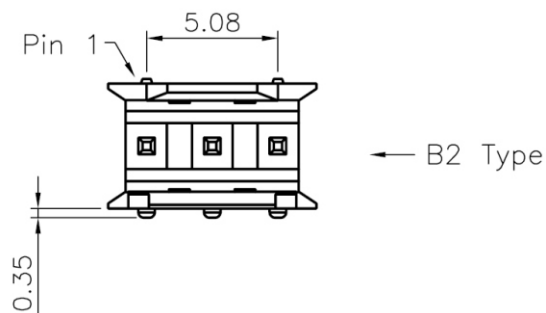
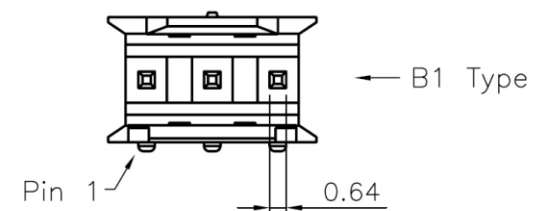


B1 Type



B2 Type

P.C.B. Layout

Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:600V AC/minute

Operating Temperature Range:-25°C ~ +105°C

Material and Finish

Insulator:High Temp. Plastic(Nylon46 UL94V-0)

Insulator Color:Black

Contact material:Copper Alloy

Plating:Gold Plated

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DUB-VXS30-1X03x-LF
SERIES
180°SMT
LEADFREE
L:L TYPE FOOT
R:R TYPE FOOT
1X03:03 WAY
SEMI GOLD 30u"
NON POST

DESCRIPTION: