


A-A

SPECIFICATION

- Current Rating : 3Amp
- Insulator Resistance : 5000 Megohms Min.
- Contact Resistance : 20 Milliohms Max.
- Dielectric Withstanding: AC 1000 V
- Operating Temperature : -40 C ~ +105 C
- Max Processing Temp : 230°C For 30 ~ 60 Seconds
(260°C For 10 Seconds)
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0
Standard: Nylon-46(TE250F3)
- Contact Plated : Full Gold, Full Tin,
Selective Plated

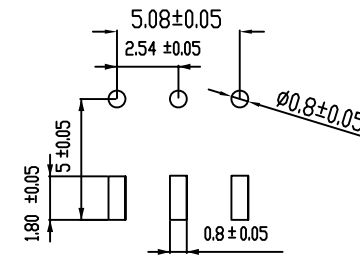

P. C. B Hole Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

DUB-WP-1X03-LF
SERIES | LEADFREE
| 03 WAY
| POST
| 90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: