

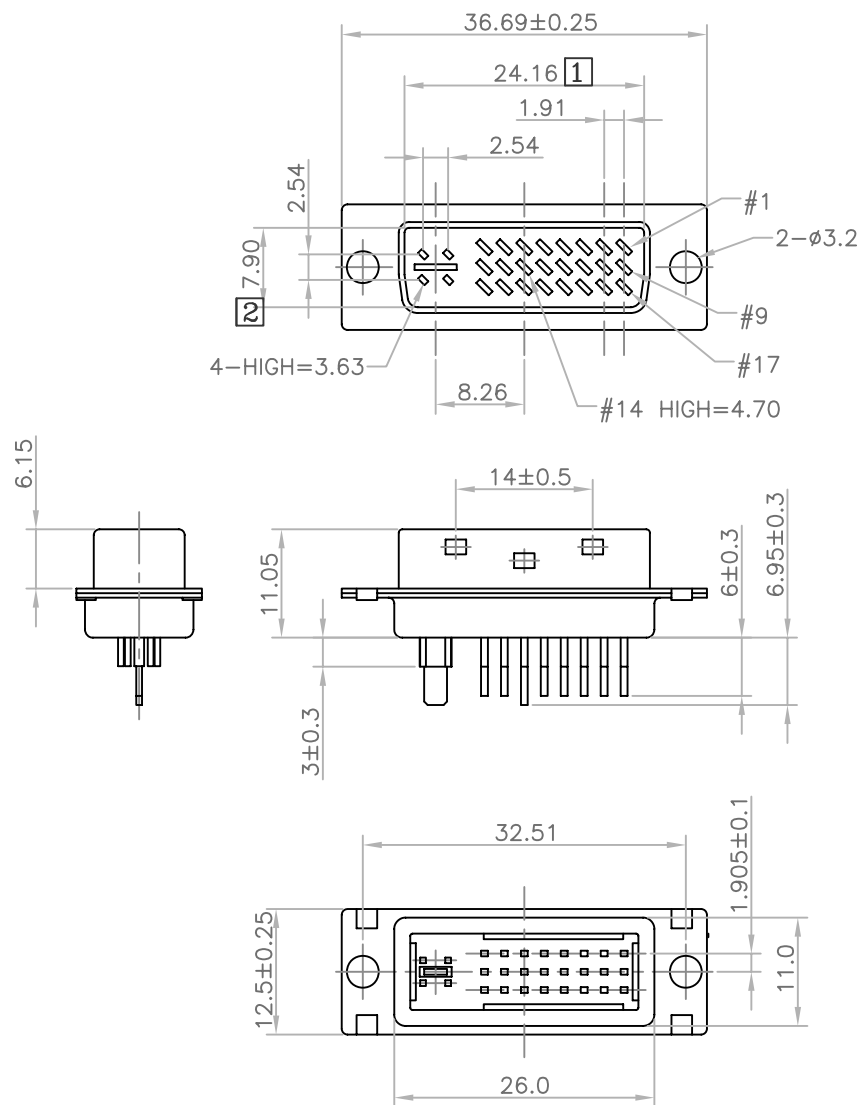



17=12+5  
Analog




19=18+1  
Digital Single Link



23=18+5  
Integrated (Analog/Digital)



25=24+1  
Digital Dual Link



29=24+5  
Intergraded (Analog/Digital)

#### MATERIALS:

HOUSING: GLASS FILLED THERMOPLASTIC  
BLACK, UL94V-0

CONTACT: BRASS

SHELL: STEEL,  
TIN OVER NICKEL PLATED

#### SPECIFICATIONS:

Voltage rating: 500VAC. R.M.S.

Current rating: 1.5 AMP

Insulation resistance: 1000 Megohms Min.

Contact resistance: 20milliohms MAX. (initial)

Durability: 300 cycles

TEMPERATURE RANGE:  $-20^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION




X,  $\pm$   
X  $\pm 0.30$   
.XX  $\pm 0.25$   
.XXX  $\pm 0.15$   
ANG  $\pm 3^{\circ}$

照片框

#### ORDER INFORMATION

DVI-PA1Txx-xx+x-LF  
SERIES MALE ASSEMBLY SINGLE PACKING THUMBSCREW  
12+5 WAY  
24+5 WAY  
55:5.50  
110:11.00

DESCRIPTION: DVI SOLDER TYPE MALE (ANALOG/DIGITAL)

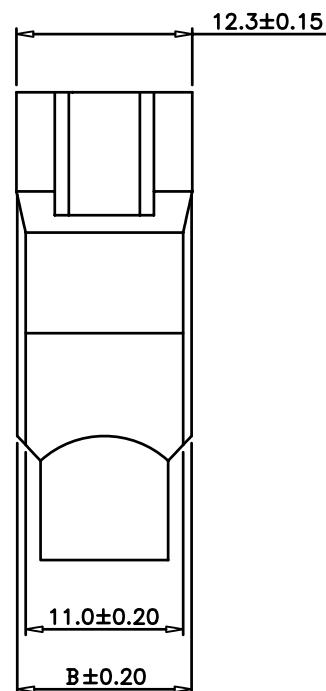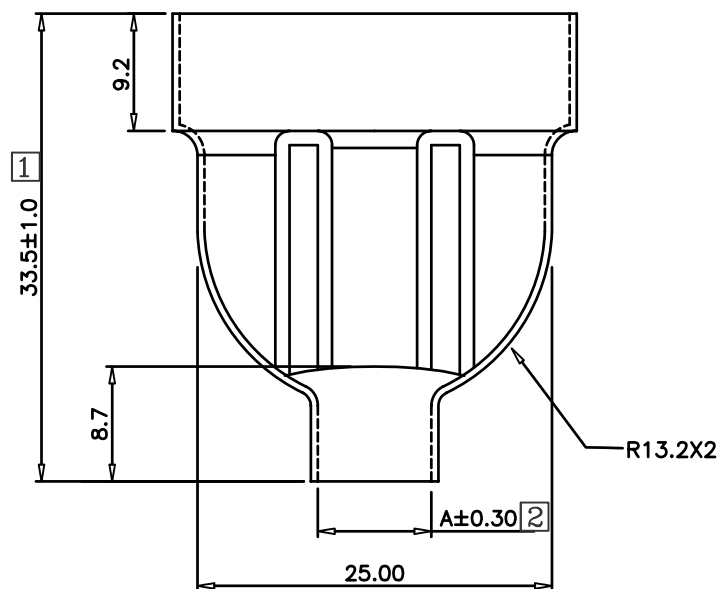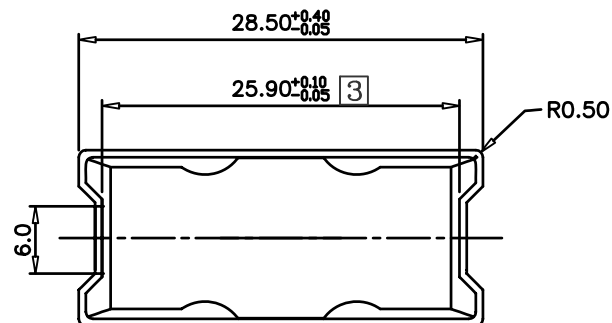

NOTE :

1. MATERIAL : SPCC (Fe)
2. THICKNESS : 0.50±0.05mm
3. FINISH : Cu : 80u"~100u" ,  
PURE Tin : 100u"~120u"

OD OPTIONS :

| ITEM | (A)DIM | (B)DIM |
|------|--------|--------|
| 1    | ø6.0   | ø11.75 |
| 2    | ø6.5   | ø11.75 |
| 3    | ø7.0   | ø11.75 |
| 4    | ø7.5   | ø11.75 |
| 5    | ø8.0   | ø11.75 |
| 6    | ø8.5   | ø11.75 |
| 7    | ø9.0   | ø11.75 |
| 8    | ø9.5   | ø11.75 |
| 9    | ø10.0  | ø11.75 |
| 10   | ø11.0  | ø12.1  |
| 11   | ø12.0  | ø13.1  |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ± 2°





PPOJECTION

照片框

ORDER INFORMATION

DVI-PA1Txx-xx+x-LF  
SERIES MALE 12+5 WAY LEADFREE  
ASSEMBLY 24+5 WAY  
SINGLE PACKING 55:5.5Ø  
THUMBSREW 110:11.0Ø


DESCRIPTION:

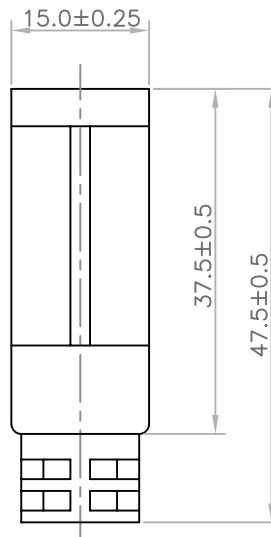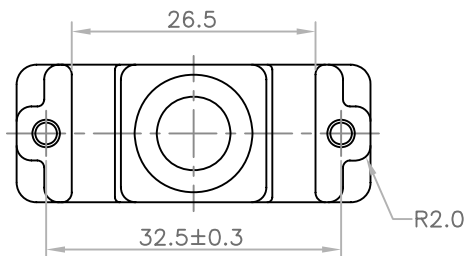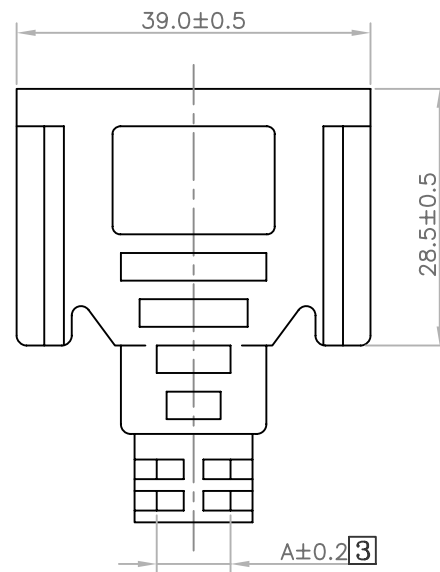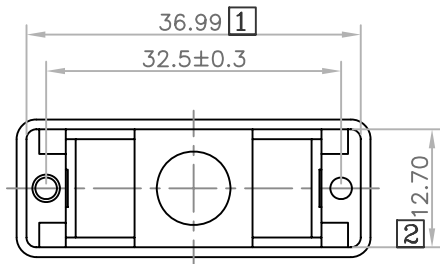

# NOTE:

MATERIAL: PVC

A=ø5.5,ø6.0,ø6.5,ø7.0,ø7.5,ø7.8,ø8.5,  
ø9.0,ø9.5,ø10.0,ø11.0

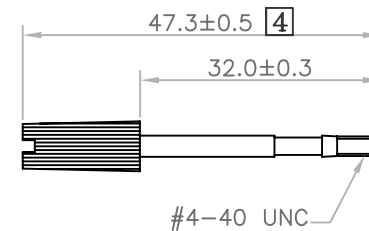

SCREW 2 PCS

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 3°

PPOJECTION

照片框

## ORDER INFORMATION

DVI-PA1Txx-xx+x-LF  
SERIES MALE ASSEMBLY SINGLE PACKING THUMBSCREW  
LEADFREE  
12+5 WAY  
24+5 WAY  
55:5.5Ø  
110:11.0Ø

DESCRIPTION: