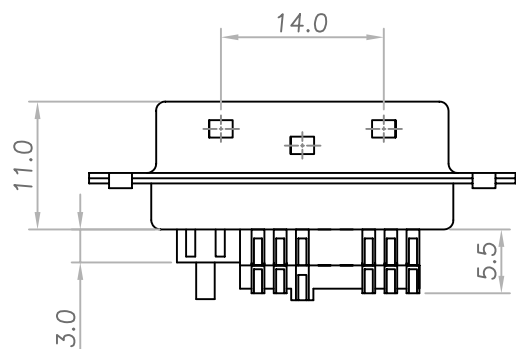
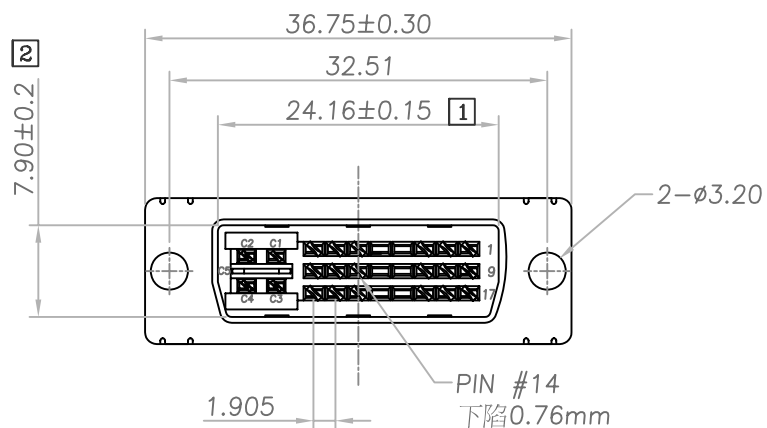


Material & Finish

SHELL:

Steel
Front Nickel Plated Steel
Black Tin Plated Steel

PIN CONTACT:

Brass
Gold Plated

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0 Black

CURRENT RATING:

1.5 Amp

CONTACT RESISTANCE:

20mΩ

DIELECTRIC STRENGTH:

500VAC for one minute

INSULATOR RESISTANCE:

1000MΩ Min. (at 500VDC)

TEMPERATURE:

-20C to +85°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.40

.XX ± 0.30

.XXX ±

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

DVI-PS-18+5-LF

SERIES | LEADFREE
18+5 PIN
SOLDER
MALE

DESCRIPTION: DVI SOLDER TYPE 18+4+KEY MALE ADDITIONAL INSULATOR