


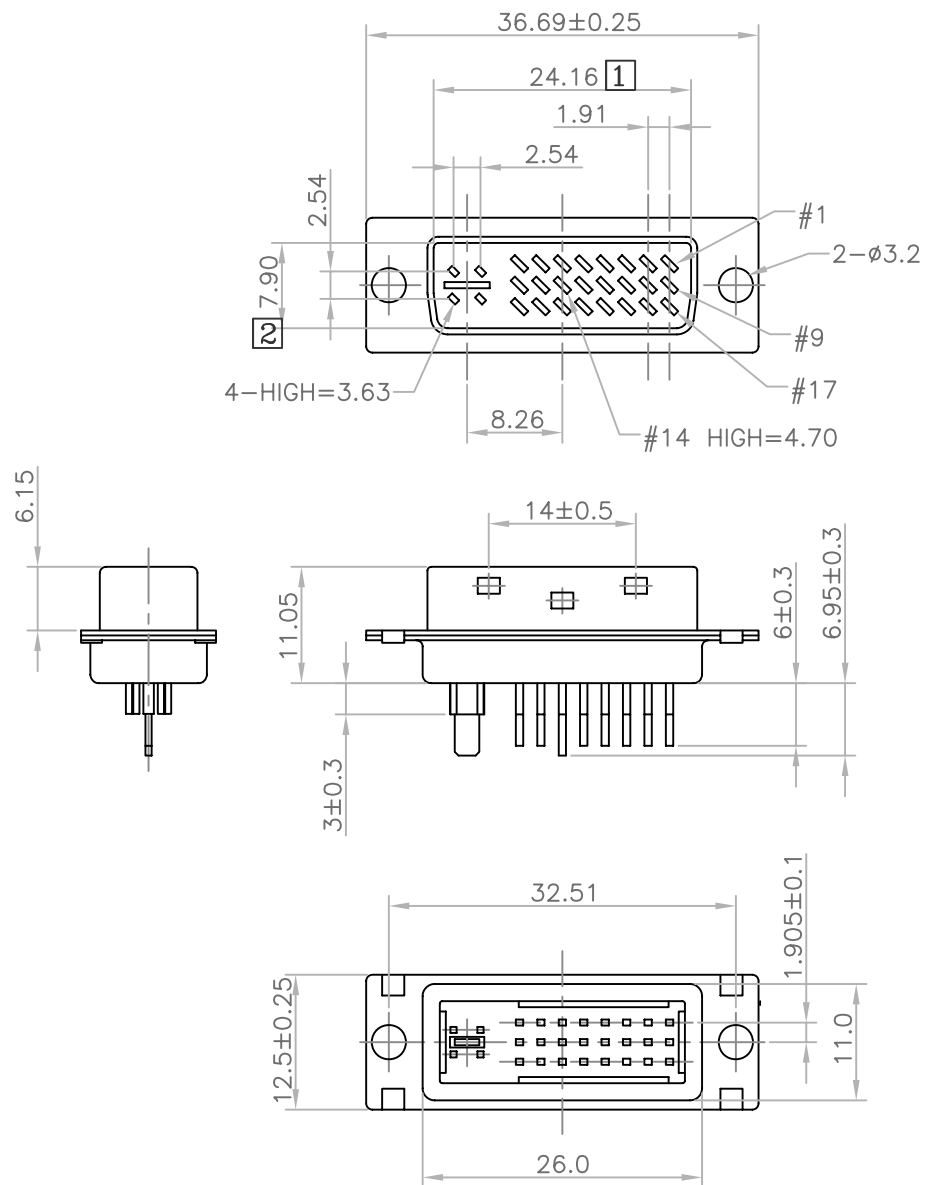

MATERIALS:

HOUSING: GLASS FILLED THERMOPLASTIC
BLACK, UL94V-0

CONTACT: BRASS

SHELL: STEEL,
TIN OVER NICKEL PLATED

SPECIFICATIONS:

Voltage rating: 500VAC. R.M.S.

Current rating: 1.5 AMP

Insulation resistance: 1000 Megohms Min.

Contact resistance: 20milliohms MAX. (initial)

Durability: 300 cycles

TEMPERATURE RANGE: -20°C to +85°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG±

PPOJECTION

照片框

ORDER INFORMATION

DVI-PSBK-24+5-LF
SERIES | BLACK | LEADFREE
SOLDER | 24+5 PIN
MALE

DESCRIPTION: DVI SOLDER TYPE MALE (ANALOG/DIGITAL)