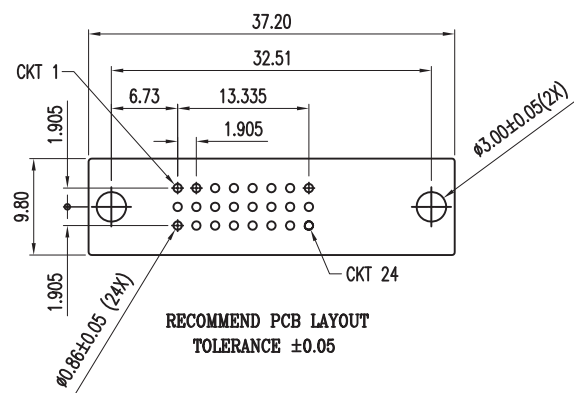


DETAIL A SCALE: 6:1

NOTES:

1. THE PRODUCT NUMBERS ARE ASSIGNED AS FOLLOWS.
2. MATERIALS
 - . INSULATOR: PBT+30% G.F. UL94V-0.
COLOR:NATURE(HOUSING) AND BLACK(SPACER)
 - . CONTACT: BRASS.
PLATING: GOLD FLASH PLATED ON CONTACT AREA
AND TIN ON SOLDER TAIL
ALL WITH NICKEL UNDERPLATING.
 - . SHELL: SPCC , NICKEL PLATED.
 - . BOARD LOCK: SPCC , TIN PLATED
 - JACK SCREWS : STEEL MATERIAL , NICKEL FINISHED
WITH #4-40 THREADED ASSEMBLED
3. ELECTRICAL
 - . VOLTAGE RATING: 250 VAC (R.M.S.)
 - . CURRENT RATING: 1.5 AMP.
 - . DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC (R.M.S.)
 - . CONTACT RESISTANCE: 30m
4. ENVIRONMENTAL
 - . TEMPERATURE RANGE: -55°C TO +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE _____

SIZE A4

PProjection 

X. $\pm$
 .X $\pm$ 0.30
 .XX $\pm$ 0.20
 .XXX $\pm$ 0.10
 ANG $\pm$ 1°

照片框

ORDER INFORMATION

DVI-SD100NJ-24+1-LF

SERIES

LEADFREE

24+1WAY

NUT+JACKSCREW

HIGH 10.0mm

DIP 180°

FEMALE

DESCRIPTION: DVI 24+1 DIP 180度母 直立插板式10.0铆锁螺丝