
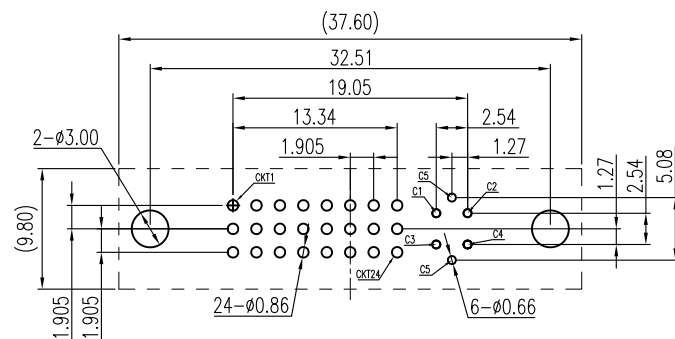
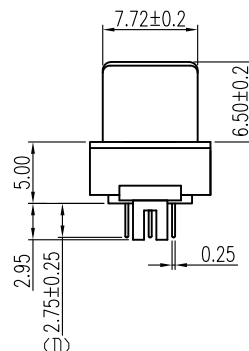
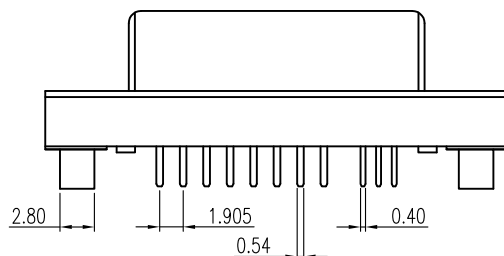


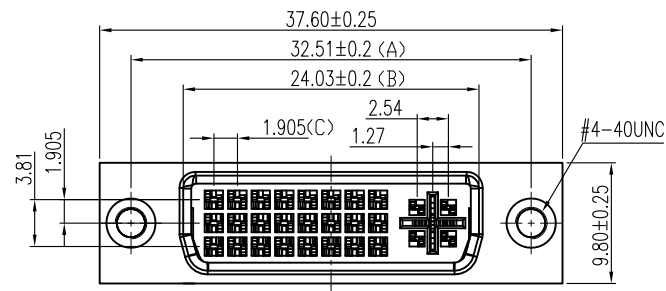

RECOMMENDED P.C.B LAYOUT


INSPECTION DIMENSION:(A)~(D)

NOTES

- MATERIAL:**
Housing:PBT, UL 94V-0, Color:Ivory.
Terminal:Copper Alloy.
Shell:SPCC
Boardlock:Copper Alloy.
Screw:Copper Alloy.
- FINISH:**
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Screw:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

SPECIFICATIONS

- DVI-I
- 1.1 Voltage: 40 VAC(RMS) Max.
- 1.2 Current Rating: 1.5 Ampere per Contact
- 1.3 Contact Resistance: 20 Milliohms Max.
- 1.4 Insulation Resistance: 1000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 500V DC(RMS)
- 1.6 Total Mating Force: 4.5 Kgf Max.
- 1.7 Total Unmating Force: 1.0 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

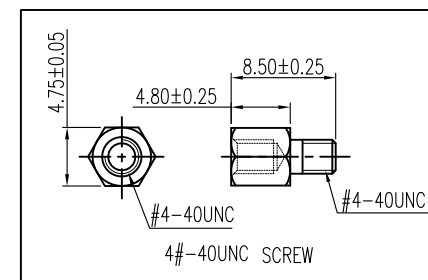

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

DVI-SDNH-24+5-LF
SERIES | JACKSCREW
NUT
DIP 180°
FEMALE

DESCRIPTION: