
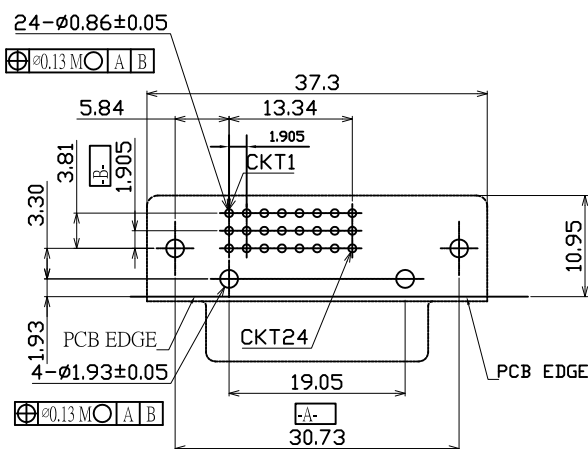
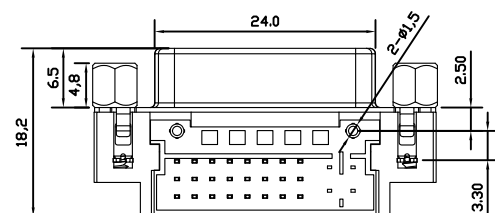

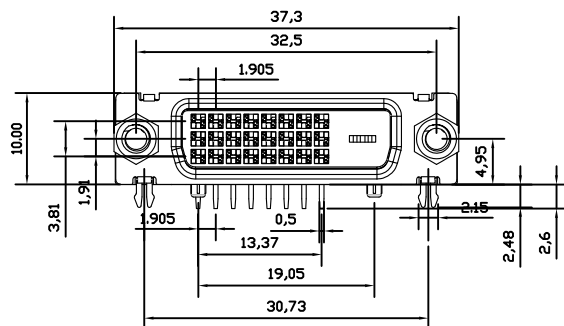
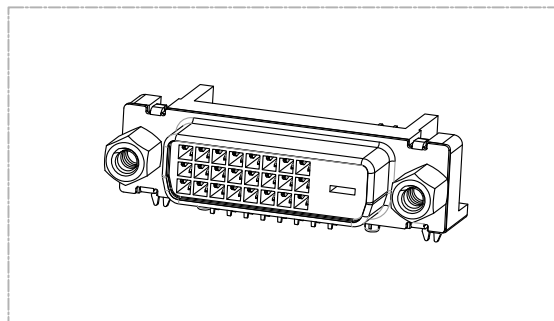


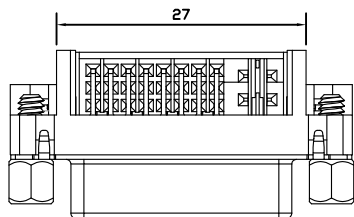

RECOMMENDED PCB LAYOUT

1. MATERIAL:

- 1.1 INSULATOR: SEE ORDER INFORMATION, UL94V-0.
INSULATOR COLOR: SEE ORDER INFORMATION.
- 1.2 CONTACT: COPPER ALLOY, SELECTIVE GOLD(SEE ORDER INFORMATION)
PLATED IN CONTACT AREA, 100u" MIN TIN PLATED IN SOLDER
AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.
- 1.3 SHELL: STEEL, 50u" MIN, NICKEL PLATED OVERALL.
- 1.4 BOARD LOCK: BRASS, 100u" MIN. TIN PLATED OVER
50u" MIN. NICKEL UNDERPLATED OVERALL.
- 1.5 SCREW: BRASS, 50u" MIN, NICKEL PLATED OVERALL.

2. ELECTRICAL CHARACTERISTICS:

- 2.1 VOLTAGE RATING: AC 40V.
- 2.2 CURRENT RATING: 1.5 A.
- 2.3 CONTACT RESISTANCE: 20mΩ MAX.
- 2.4 INSULATION RESISTANCE: 1000MΩ MIN.
- 2.5 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.
- 2.6 OPERATING TEMPERATURE: -40°C~+105°C

3. NOTES:

- 3.1 THIS COMPONENT AND ITS HOMOGENEOUS
SUBCOMPONENTS ARE RoHS COMPLIANT.
- 3.2 RESISTANCE TO SOLDERING HEAT: 265°C FOR 5 SECONDS,
AND ONLY FOR WAVE SOLDERING PROCESS.
(THE POST WILL BE MELTED)

RoHS Compliant

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

DVI-SRJ-24+1-LF
SERIES | | | LEADFREE
24+1 PIN
FEMALE | NUT | JACKSCRW
DIP 90°

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com