

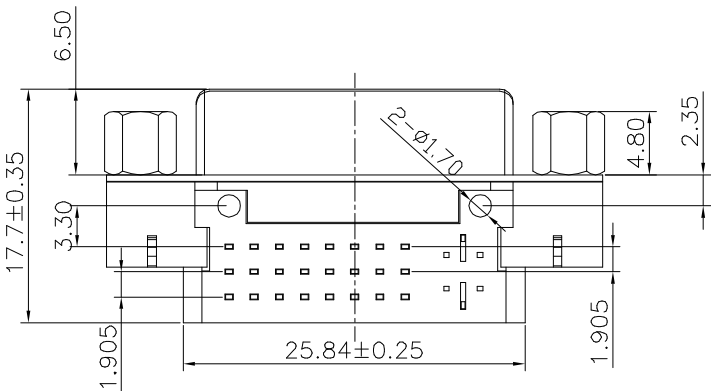
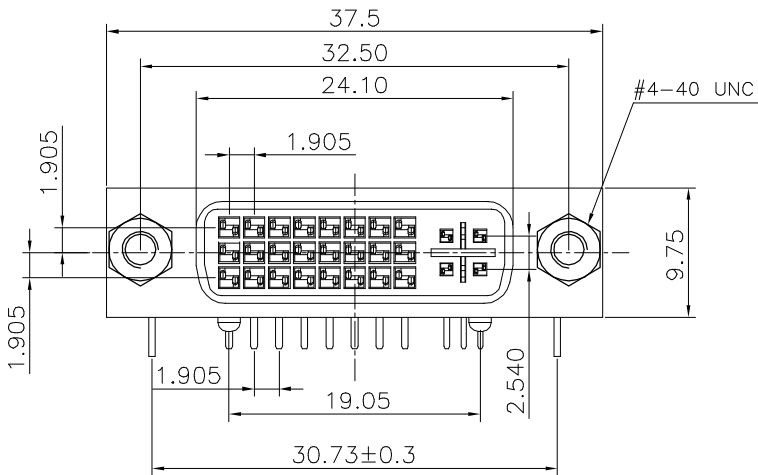


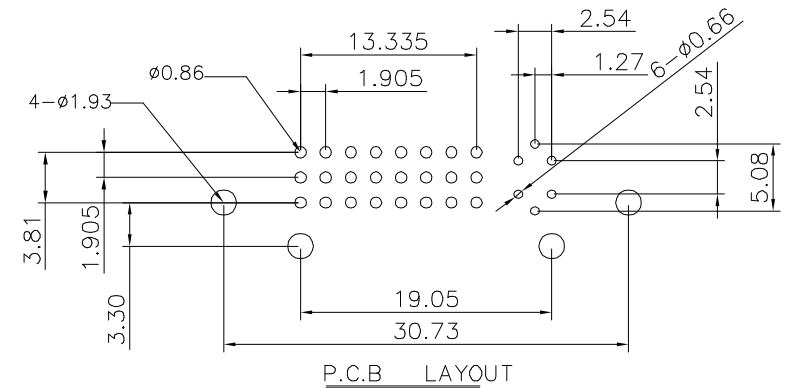

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

ELECTRICAL SPECIFICATION

INSULATION RESISTANCE: 1000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE: 500 V AC RMS
CONTACT RESISTANCE: 30 MILIOHMS MAX.
OPERATING TEMPERATURE: -20°C TO 85°C

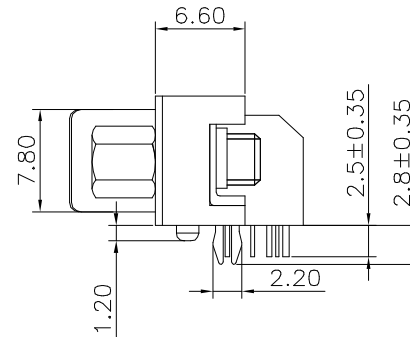

⑦	BOARD LOCK	2	BRASS	Sn
⑥	SHELL	1	SPCC	Ni
⑤	RIVET	2	COPPER ALLOY	Ni
④	COVER	1	PA66+30%G/F	NATURE
③	PORTREPLICATOR	4	COPPER ALLOY	SEMI-GOLD TIN
②	DIGITAL SIDE	24	COPPER ALLOY	SEMI-GOLD TIN
①	INSULATOR	1	Pbt+30%G/F	NATURE
ITEM	PART NAME	QTY.	MATERIAL	REMAKS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DVI-SRJ-24+5-LF
SERIES | | | LEADFREE
24+5 PIN
FEMALE | NUT | JACKSCRW
DIP 90°

DESCRIPTION: DVI 24+5 母 90度 鉚合 (中柱)