
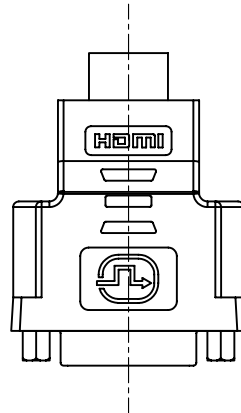

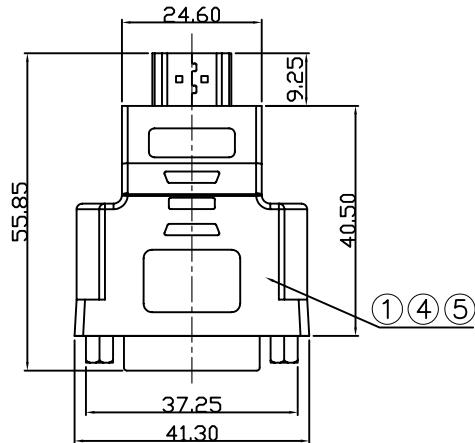


接線表

DVI(24+1)F HDMI 19M

1	3	(紅)
2	1	(白)
3	2	(地線)
9	6	(綠)
10	4	(白)
11	5	(地線)
17	9	(藍)
18	7	(白)
19	8	(地線)
24	12	(棕)
23	10	(白)
22	11	(地線)
6	15	(橙)
7	16	(黃)
14	18	(白)
15	17	(紅)
16	19	(紫)
鐵殼	鐵殼	

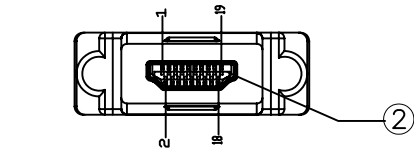

Specification:

1. 100% OPER SHORT AND MISS WIRE TESTS.
2. Current Rating: DC 1A
3. Insulation Resistance: DC500V, $R \geq 20M\Omega$
4. Contact Resistance: 2 Ω MAX

5	內模	AR		LD-PE		
4	外模	AR		PVC 45P BLACK		
3	CONN	1PCS		DVI(24+1)/F BLACK PLATED 15U"		
2	CONN	1PCS		HDMI 19P/M PLATED 30U" BLACK		
1	CABLE	AR		UL20276 (28#*1P+D+FREE EDGE AL/MY)*4+28#*1P +28#*5C+AB OD:7.3 BLACK		
序號 NO.	部品名稱 DESCRIPTION	用量 QTY.	料號 PART NO.	材質 MATERIAL	表面處理 FINISH	備註 REMARKS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DVIHDMI-AMBK-2519-LF

SERIES

LEADFREE

25 TO 19 WAY

BLACK
MOLDING
FEMALE TO MALE

DESCRIPTION: HDMI TO DVI ADAPTER