





WIRE DIAGRAM

HDMI 19PIN (M)	DVIDD 25PIN (F)
1	2
2	3
3	1
4	10
5	11
6	9
7	18
8	19
9	17
10	23
11	22
12	24
13	NC
14	NC
15	6
16	7
17	15
18	14
19	16
shell	shell

P/N	Color
DVIHDMI-AMBK-2519	Black
DVIHDMI-AMGE-2519	Grey
DVIHDMI-AMBG-2519	Beige

HDMI19M

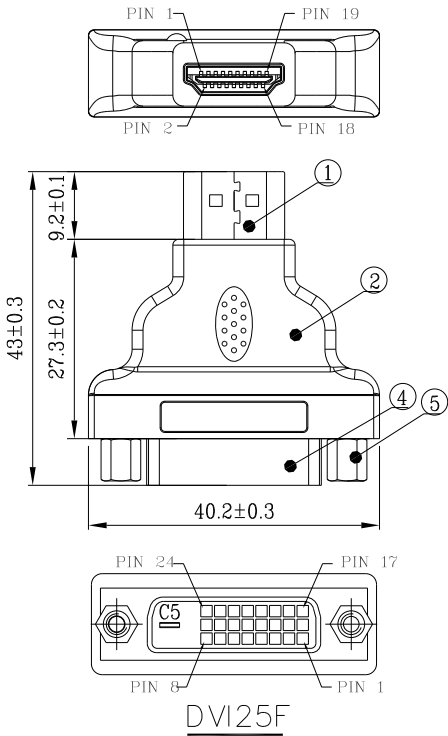

RoHS

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 5MΩ

COMPONENTS	DESCRIPTION	Q'TY
1 HDMI19M	HDMI19P Male Connector Shell: Brass Nickel Plated Insulator: Black LCP Contact: Copper Alloy μ 30 " Gold Plating.	1
2 Hood	P.V.C Molded Color: XX	1
3 PCB(70-541-00)	FR/4 T:1.6mm	1
4 DVI25F	DVI-Digital 25P Female Connector Insulator: PBT UL-94V-0 Color: White Shell: Steel With Nickel Plated Contact :Copper Alloy Gold Plated	1
5 Hex Nut	UNC #4-40 Nickel Plated	2

RoHS Compliant

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

DVIHDMI-AMxx-2519-LF

SERIES

LEADFREE

25 TO 19 WAY

BK:BLACK

GE:GREY

BG:BEIGE

MOLDING

FEMALE TO MALE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com