


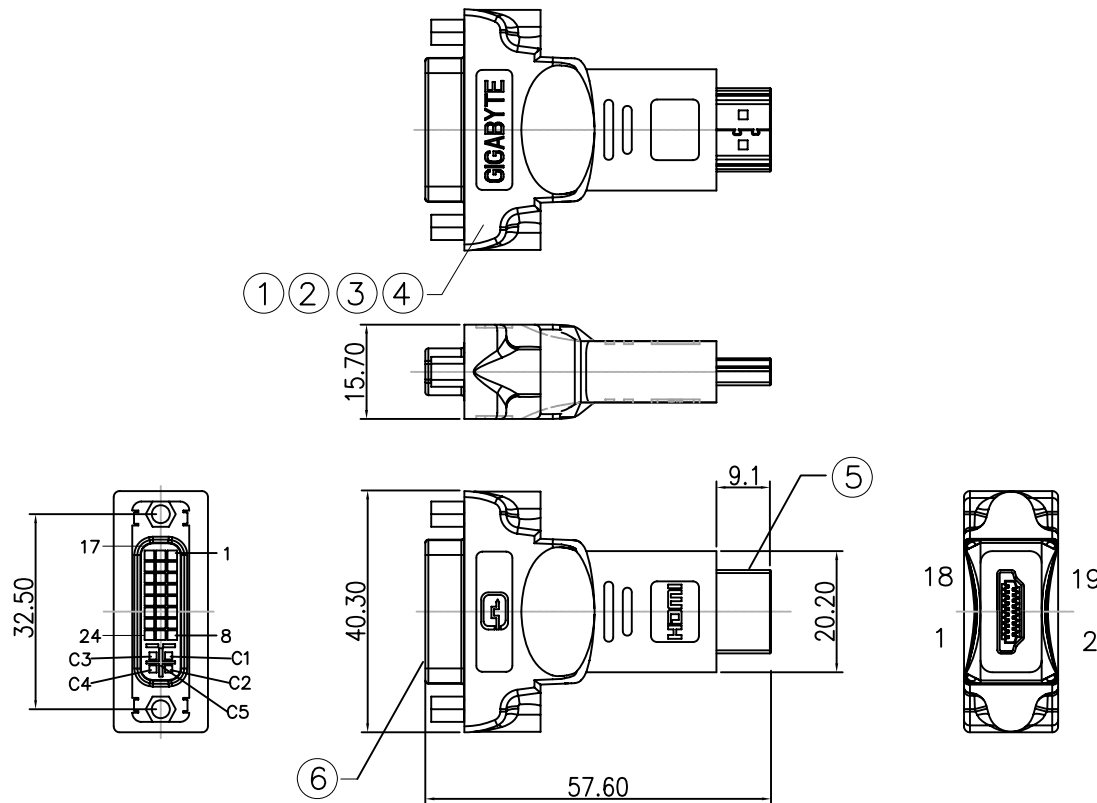

6	DVI CONN	1		DVI 24+5 FEMALE 焊線成型式 端子鍍金 15U"	鐵殼鍍銀	
5	HDMI CONN	1		HDMI CONN. 19P MALE SOLDER TERMINAL PLATED 30U" INSULATION BLACK	鐵殼鍍銀	
4	PVC	AR		PVC: 45Pa BLACK		
3	PE	AR		PE LOW DENSITY		
2	WIRE	1		UL1007 28#(7C/0.127TS) BLACK OD:1.2MM		
1	CABLE	AR		UL20276 (28AWG*1PR+DRAIN WIRE+ FREE EDGE AL/MYLAR)*4P+28AWG*1P +28AWG*5C+AL/MYLAR+BRAID OD: 7.3 BLACK IMPEDANCE: 100 Ohm		
序號 NO.	部品名稱 DESCRIPTION	用量 QTY.	料號 PART NO.	材質 MATERIAL	表面處理 FINISH	備註 REMARKS

ELECTRICAL CHARACTER:

1. CUTTENT RATING: DC 1A
2. WITH STANDING VOLTAGE:DC 300V
3. INSULATION RESISTANCE: 20Mohm(MIN)
4. CONDUCTIVE RESISTANCE:2 Ohm(MAX)

PIN ASSIGNMENT:

DVI CONN.	HDMI 19P CONN.
(紅) 1	3 (TMDS Data 2-)
(白) 2	1 (TMDS Data 2+)
(地線) 3	2 (TMDS Data 2 Shield)
(綠) 9	6 (TMDS Data 1-)
(白) 10	4 (TMDS Data 1+)
(地線) 11	5 (TMDS Data 1 Shield)
(藍) 17	9 (TMDS Data 0-)
(白) 18	7 (TMDS Data 0+)
(地線) 19	8 (TMDS Data 0 Shield)
(棕) 24	12 (TMDS Clock -)
(白) 23	10 (TMDS Clock +)
(地線) 22	11 (TMDS Clock Shield)
(橙) 6	15 (DDC Clock)
(黃) 7	16 (DDC Data)
(白) 14	18 (+5V Power)
(紅) 15	17 (Ground)
(紫) 16	19 (Hot Plug Detect)
SHELL	SHELL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DVIHDMI-AMxx-2919-LF

SERIES

LEADFREE

29 TO 19 WAY

BK:BLACK

GE:GREY

BG:BEIGE

MOLDING

FEMALE TO MALE

DESCRIPTION: HDMI 19P MALE-DVI(24+5) F ADAPTER