
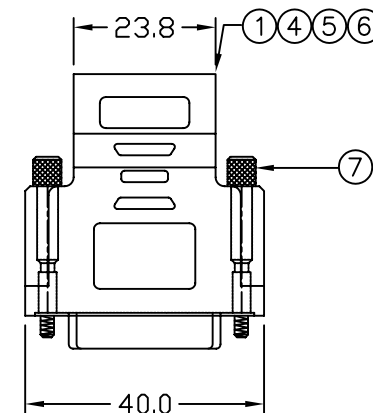
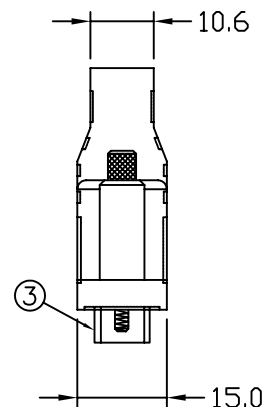
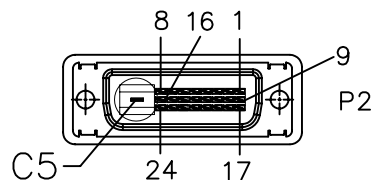
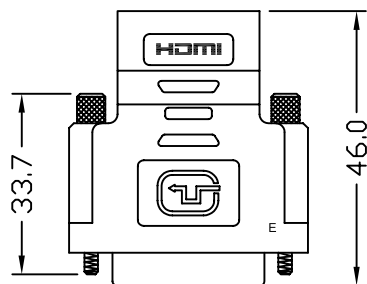




PIN ASSIGNMENT:

P1	P2
1	3
2	1
3	2
6	15
7	16
9	6
10	4
11	5
14	18
15	17
16	19
17	9
18	7
19	8
22	11
23	10
24	12
SHELL	SHELL

ELECTRICAL CHARACTER:

1. 100% OPEN&SHORT TESTING
2. WITHSTANDING VOLTAGE:DC 300V 0.1Sec
3. INSULATION RESISTANCE:10M Ohms(Min)
4. CONDUCTIVE RESISTANCE:2 Ohms(Max)

7	SCREW		2PCS	SCREW: 4-40# 2.8*33.7MM
6	COPPER FOIL		2PCS	COPPER FOIL TO BE SOLDER AROUND 360°
5	OVERMOLD		12g	PVC 45Pa BLACK UL94V-0
4	INNERMOLD		8g	PE LOW DENSITY
3	DVI CONN.		1PCS	DVI(24+1)/M 端子鍍金G/F,絕緣體黑色,鐵殼鍍鎳.
2	HDMI CONN.		1PCS	HDMI 19P/F 端子鍍金G/F,絕緣體黑色,鐵殼鍍鎳.
1	WIRE CABLE		18PCS	UL1007 28AWG(7/0.127TA) BLACK 32MM
NO.	PART NAME	PART NO.	Q'TY	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

DRAWING BY CY

CHECKED BY GENINS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES


煜倫股份有限公司

www.morethanall.com



ORDER INFORMATION

DVIHDMI-EMBK-2519-LF

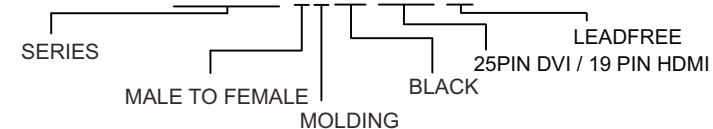

DESCRIPTION: HDMI/F TO DVI(24+1)/M ADAPTER